

### GENERAL DESCRIPTION

The PT5306 is a single supply, high efficiency 2.5W class D audio amplifier. A low noise, filterless PWM architecture eliminates the output filter, reducing external component count, board area consumption, system cost, and simplifying design.

The PT5306 is designed to meet the demands of mobile phones and other portable communication devices. Operating on a single 5V supply, it is capable of driving a 4Ω speaker load at a continuous average output of 2.5W with less than 10% THD+N. Its flexible power supply requirements allow operation from 2.5V to 5.5V.

The PT5306 has high efficiency with speaker loads compared to a typical Class AB amplifier. With a 5V supply driving an 8Ω speaker, the IC's efficiency for a 100mW power level is 82%, and reaching 90% at 400mW output power.

### FEATURES

- 2.5W Into 4 Ω from a 5V Supply at THD=10% (Typ)
- High Efficiency: 90% at 400mW, 5V power supply and 8Ω Speaker,
- 4mA Quiescent Current
- 0.5uA Shutdown Current
- 70dB PSRR at 217Hz
- Advanced pop & click circuitry
- Thermal overload protection
- Low power shutdown mode
- Only Three External Components
- Wide Supply Voltage (2.5V to 5.5V)
- Space Saving Packages: 9 Bump SMD package and 3mm×3mm DFN8 package


### APPLICATIONS

- Cell Phones
- Handheld Computers and PDAs
- Portable electronic device

### ORDERING INFORMATION


| PACKAGE | TEMPERATURE RANGE | ORDERING PART NUMBER | TRANSPORT MEDIA            | MARKING         |
|---------|-------------------|----------------------|----------------------------|-----------------|
| DFN-8   | -40 °C to 85 °C   | PT5306EQFN           | Tape and Reel<br>5000units | PT5306<br>xxxxX |
| SMD-9   | -40 °C to 85 °C   | PT5306ESMD           | Tape and Reel<br>3000units | P5306<br>xxxxX  |

### TYPICAL APPLICATIONS

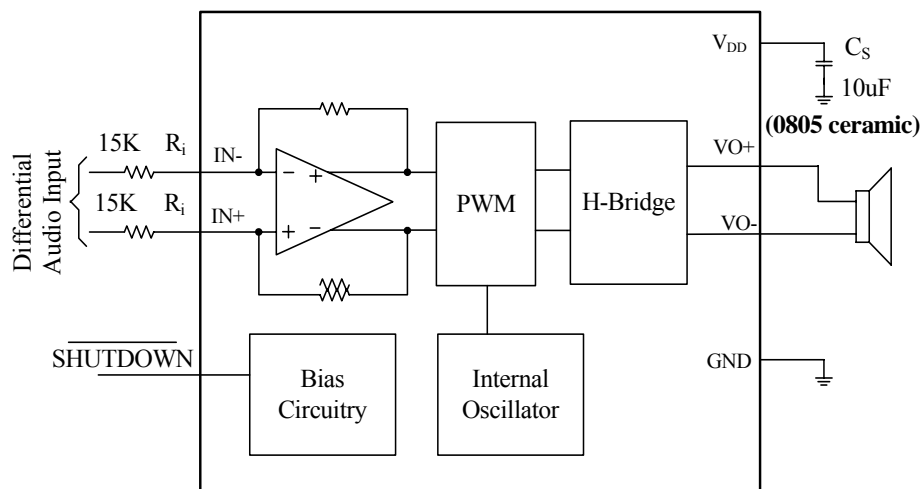


### PIN ASSIGNMENT

9 Bump micro SMD Package  
( Top View of PCB )




DFN-8  
( Top View of PCB )

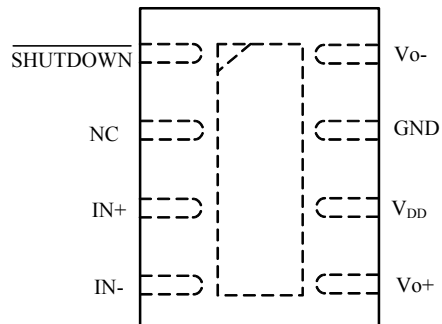

### PIN DESCRIPTIONS

| SMD9 | DFN8 | PIN NAME               | DESCRIPTION                          |
|------|------|------------------------|--------------------------------------|
| C2   | 1    | $\overline{ShoutDown}$ | Shutdown terminal (active low logic) |
| A1   | 3    | IN+                    | Positive differential input          |
| C1   | 4    | IN-                    | Negative differential input          |
| C3   | 5    | V <sub>O+</sub>        | Positive BTL output                  |
| B1   | 6    | V <sub>DD</sub>        | Power supply                         |
| A2   | 7    | GND                    | Ground                               |
| A3   | 8    | V <sub>O-</sub>        | Negative BTL output                  |
| B3   |      | PGND                   | High current ground                  |
| B2   |      | PV <sub>DD</sub>       | High current power supply            |

### PAD ASSIGNMENT

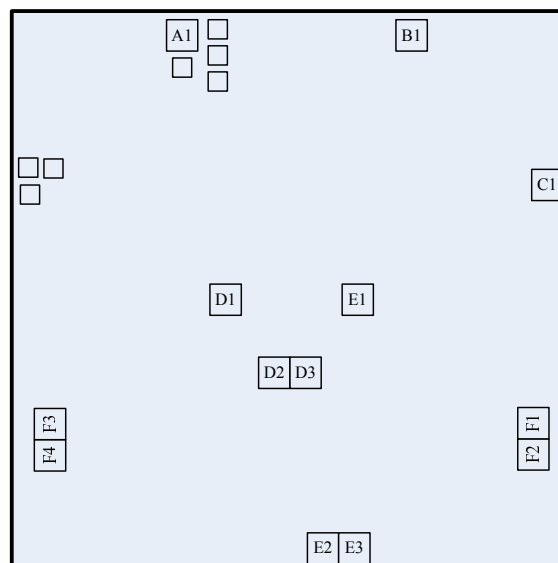

**PAD DESCRIPTIONS**

| PADS  | NAMES | POSITION                        | DESCRIPTION                          |
|-------|-------|---------------------------------|--------------------------------------|
| A1    | INP   | (-315.7,616.1)                  | Positive differential input          |
| B1    | INN   | (340.2,616.6)                   | Negative differential input          |
| C1    | SD    | (620.5,179.1)                   | Shutdown terminal (active low logic) |
| D1    | VDDA  | (-216.5,-22.9)                  | Power supply                         |
| D2,D3 | VDDP  | (-39.1,-189.1),(40.9,-189.1)    | Power supply                         |
| E1    | GND A | (213.9,-22.9)                   | Ground                               |
| E2,E3 | GND P | (54.5,-637.6),(134.5,-637.6)    | Ground                               |
| F1,F2 | VOP   | (607.6,-335.6),(607.6,-415.6)   | Positive BTL output                  |
| F3,F4 | VON   | (-607.6,-335.6),(-607.6,-415.6) | Negative BTL output                  |

**ABSOLUTE MAXIMUM RATINGS (Note 1)**

| SYMBOL              | ITEMS  | VALUE                     | UNIT |
|---------------------|--|---------------------------|------|
| V <sub>DD</sub>     | Supply Voltage                                   | -0.3~6                    | V    |
| V <sub>IN</sub>     | Input Voltage                                    | -0.3~V <sub>DD</sub> +0.3 | V    |
| P <sub>DMAX</sub>   | Power Dissipation (Note 2)                       | Internally Limited        | W    |
| P <sub>TR1</sub>    | Thermal Resistance, DFN8: $\theta_{JA}$          | 63                        | °C/W |
| P <sub>TR2</sub>    | Thermal Resistance, SMD9: $\theta_{JA}$ (Note 3) | 180                       | °C/W |
| T <sub>A</sub>      | Operating free-air temperature                   | -40 to 85                 | °C   |
| T <sub>J</sub>      | Operating junction temperature                   | -40 to 150                | °C   |
| T <sub>stg</sub>    | Storage Temperature                              | -55 to 150                | °C   |
| T <sub>solder</sub> | Package Lead Soldering Temperature               | 260°C, 10s                |      |
|                     | ESD Susceptibility (Note 4)                      | 2500                      | V    |

**RECOMMENDED OPERATING RANGE (Note 5)**

| SYMBOL          | ITEMS                                    | VALUE                      | UNIT |
|-----------------|--|----------------------------|------|
| V <sub>DD</sub> | Supply voltage                           | 2.5 ~ 5.5                  | V    |
| V <sub>IH</sub> | $\overline{ShoutDown}$                   | 2 ~ V <sub>DD</sub>        | V    |
| V <sub>IL</sub> | $\overline{ShoutDown}$                   | 0 ~ 0.8                    | V    |
| R <sub>I</sub>  | Input resistor (A <sub>V</sub> ≤ 20 V/V) | 15                         | KΩ   |
| V <sub>IC</sub> | Common mode input voltage range          | 0.5 ~ V <sub>DD</sub> -0.8 | V    |
| T <sub>A</sub>  | Operating free-air temperature           | -40 to 85                  | °C   |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur.

**Note 2:** The maximum power dissipation must be derated at elevated temperatures and is dictated by T<sub>JMAX</sub>,  $\theta_{JA}$ , and

the ambient temperature  $T_A$ . The maximum allowable power dissipation is  $P_{D_{MAX}} = (T_{J_{MAX}} - T_A) / \theta_{JA}$  or the number given in Absolute Maximum Ratings, whichever is lower.

**Note 3:** All bumps have the thermal resistance and contribute equally when used to lower thermal resistance. All bumps must be connected to achieve specified thermal resistance.

**Note 4:** Human body model, 100pF discharged through a 1.5k $\Omega$  resistor.

**Note 5:** Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.

## ELECTRICAL CHARACTERISTICS (Note 6, 7)

The following specifications apply for 8 $\Omega$  load, and  $A_V=2$  V/V,  $T_A=25$  °C, unless specified otherwise.

| SYMBOL     | ITEMS                                | CONDITIONS   | MIN.                               | TYP.                               | MAX.                               | UNIT       |   |
|------------|--------------------------------------|--|------------------------------------|------------------------------------|------------------------------------|------------|---|
| $ V_{OS} $ | Output offset voltage                | $V_I=0$ , $V_{DD}=2.5$ to $5.5V$ ,<br>$A_V = 2V/V$         |                                    |                                    | 25                                 | mV         |   |
| $I_Q$      | Quiescent current                    | $V_{DD}=5.5V$ , no load                                    |                                    | 4                                  | 7.5                                | mA         |   |
|            |                                      | $V_{DD}=3.6V$ , no load                                    |                                    | 3.8                                | 7.0                                | mA         |   |
|            |                                      | $V_{DD}=2.5V$ , no load                                    |                                    | 2.3                                | 6.5                                | mA         |   |
| $I_{SD}$   | Shutdown current                     | $V(\overline{ShoutDown})=0.8V$ ,<br>$V_{DD}=2.5$ to $5.5V$ |                                    | 0.2                                | 1                                  | $\mu A$    |   |
| $R_{out}$  | Output impedance in shutdown mode    | $V(\overline{ShoutDown})=0.8V$                             |                                    | >1                                 |                                    | K $\Omega$ |   |
| $f_{SW}$   | Switching frequency                  | $V_{DD}=2.5$ to $5.5V$                                     | 400                                | 500                                | 600                                | KHz        |   |
| $A_V$      | Gain                                 |  | $2 \times \frac{142 K\Omega}{R_I}$ | $2 \times \frac{150 K\Omega}{R_I}$ | $2 \times \frac{158 K\Omega}{R_I}$ | V/V        |   |
| $P_O$      | Output power                         | THD+N=10%,<br>$f=1KHz$ ,<br>$R_L=4\Omega$                  | $V_{DD}=5V$                        |                                    | 2.50                               |            | W |
|            |                                      |  | $V_{DD}=3.6V$                      |                                    | 1.20                               |            |   |
|            |                                      |  | $V_{DD}=2.5V$                      |                                    | 0.50                               |            |   |
|            |                                      | THD+N=1%,<br>$f=1KHz$ ,<br>$R_L=4\Omega$                   | $V_{DD}=5V$                        |                                    | 2.00                               |            |   |
|            |                                      |  | $V_{DD}=3.6V$                      |                                    | 1.00                               |            |   |
|            |                                      |  | $V_{DD}=2.5V$                      |                                    | 0.32                               |            |   |
|            |                                      | THD+N=10%,<br>$f=1KHz$ ,<br>$R_L=8\Omega$                  | $V_{DD}=5V$                        |                                    | 1.40                               |            |   |
|            |                                      |  | $V_{DD}=3.6V$                      |                                    | 0.65                               |            |   |
|            |                                      |  | $V_{DD}=2.5V$                      |                                    | 0.50                               |            |   |
|            |                                      | THD+N=1%,<br>$f=1KHz$ ,<br>$R_L=8\Omega$                   | $V_{DD}=5V$                        |                                    | 1.16                               |            |   |
|            |                                      |  | $V_{DD}=3.6V$                      |                                    | 0.60                               |            |   |
|            |                                      |  | $V_{DD}=2.5V$                      |                                    | 0.27                               |            |   |
| THD+N      | Total harmonic distortion plus noise | $P_O=1W$ ,<br>$f=1KHz$ ,<br>$R_L=8\Omega$                  | $V_{DD}=5V$                        |                                    | 0.2%                               |            |   |
|            |                                      | $P_O=0.5W$ ,<br>$f=1KHz$ ,<br>$R_L=8\Omega$                | $V_{DD}=3.6V$                      |                                    | 0.1%                               |            |   |
|            |                                      | $P_O=0.2W$ ,<br>$f=1KHz$ ,<br>$R_L=8\Omega$                | $V_{DD}=2.5V$                      |                                    | 0.1%                               |            |   |



### ELECTRICAL CHARACTERISTICS (Continued) (Note 6, 7)

| SYMBOL   | ITEMS                        | CONDITIONS  | MIN.         | TYP. | MAX. | UNIT    |         |
|----------|------------------------------|---|--------------|------|------|---------|---------|
| PSRR     | Power supply rejection ratio | $V_{DD} = 2.5$ to $5.5V$  |              | -70  | -55  | dB      |         |
| CMRR     | Common mode rejection ratio  | $V_{DD} = 2.5$ to $5.5V$ ,<br>$V_{IC} = 0.5$ to $V_{DD} - 0.8V$                 |              | -60  | -49  | dB      |         |
| SNR      | Signal-to-noise ratio        | $V_{DD} = 5V$ , $R_L = 8\Omega$ , $P_O = 1W$                                    |              | 95   |      | dB      |         |
| $V_n$    | Output voltage noise         | $V_{DD} = 3.6V$ ,<br>BW = 20Hz to 20kHz, Inputs ac-grounded with $C_i = 2\mu F$ | No Weighting |      | 50   |         | $\mu V$ |
|          |                              |   | A Weighting  |      | 40   |         | $\mu V$ |
| $T_{su}$ | Start-up time from shutdown  |   |              | 650  |      | $\mu s$ |         |







**Note 6:** Typicals are measured at 25°C and represent the parametric norm.

**Note 7:** Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.







### TYPICAL PERFORMANCE CHARACTERISTICS

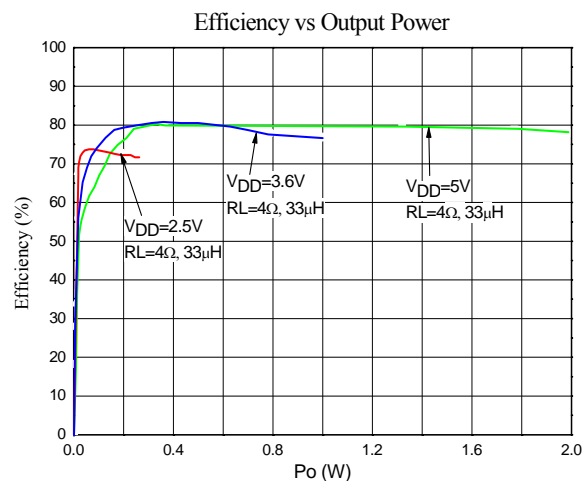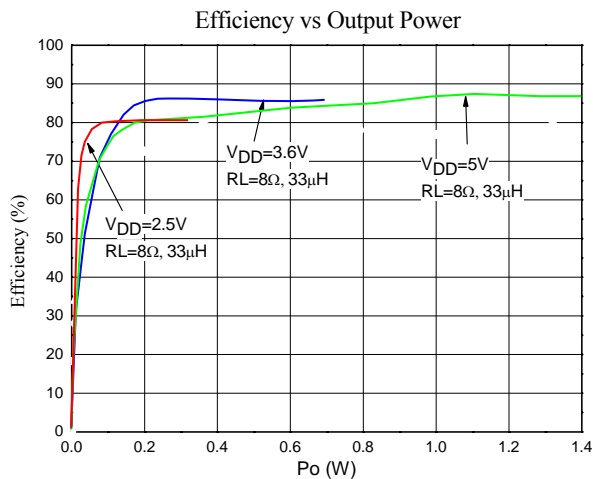







### TYPICAL PERFORMANCE CHARACTERISTICS

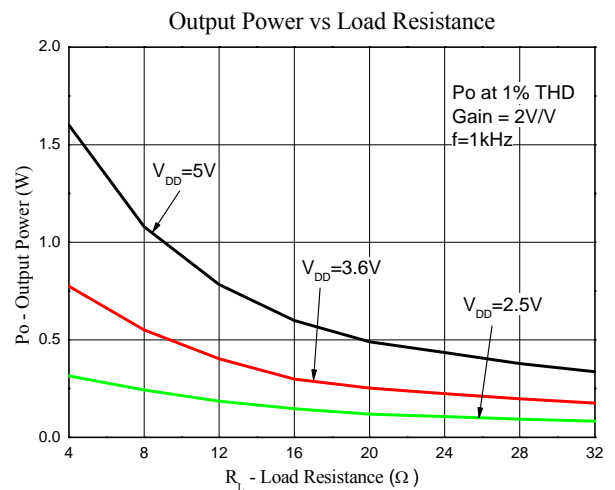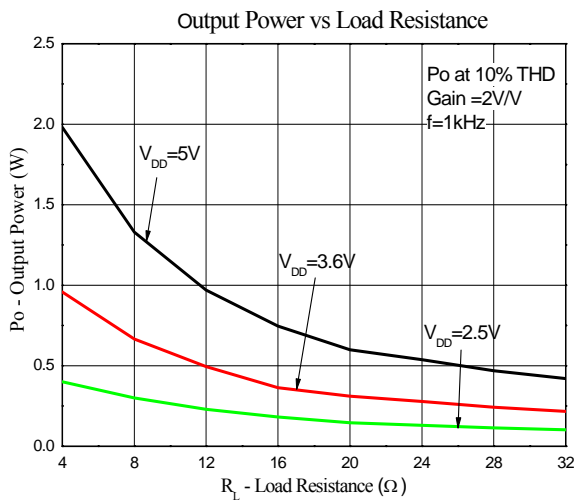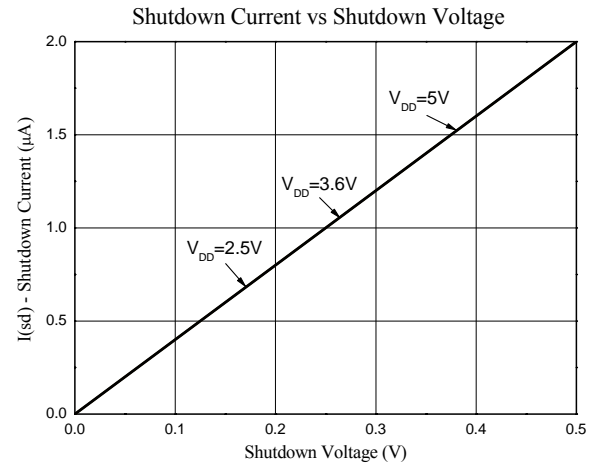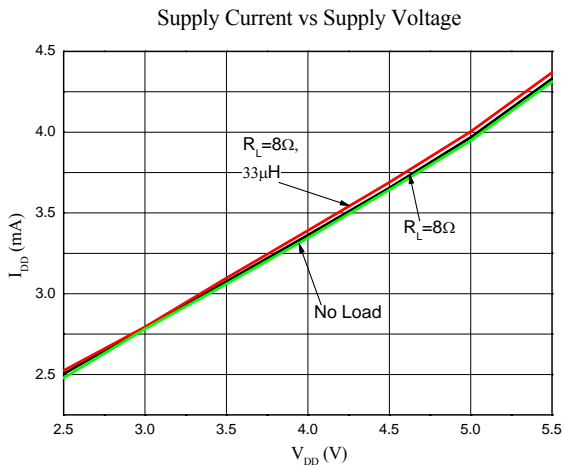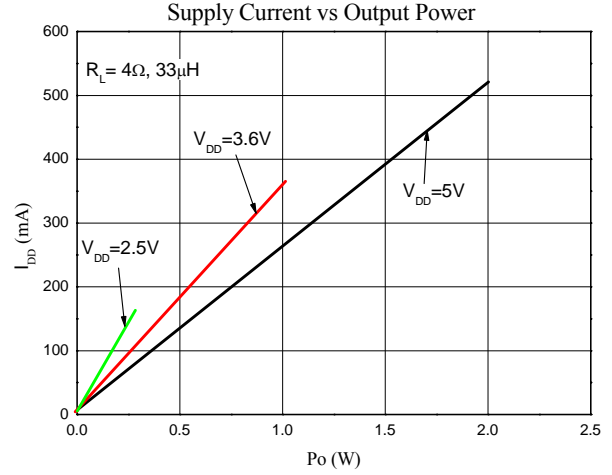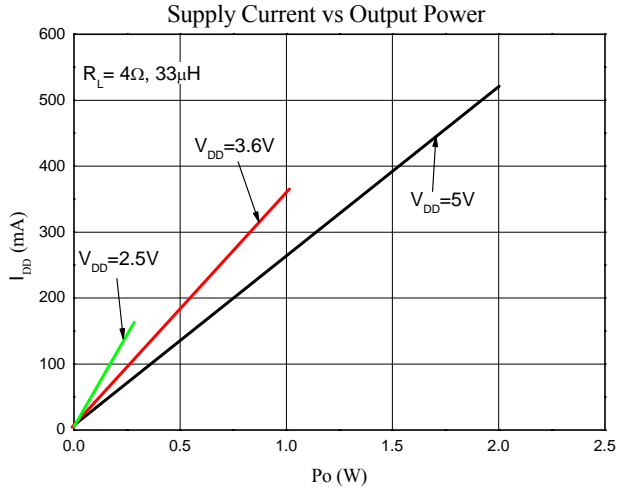

### TYPICAL PERFORMANCE CHARACTERISTICS

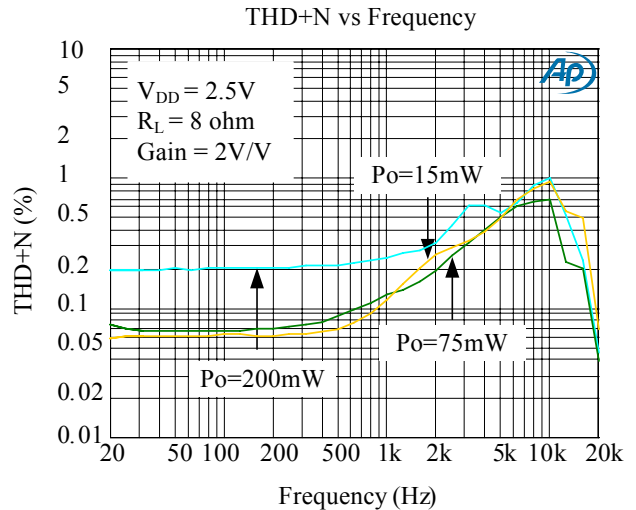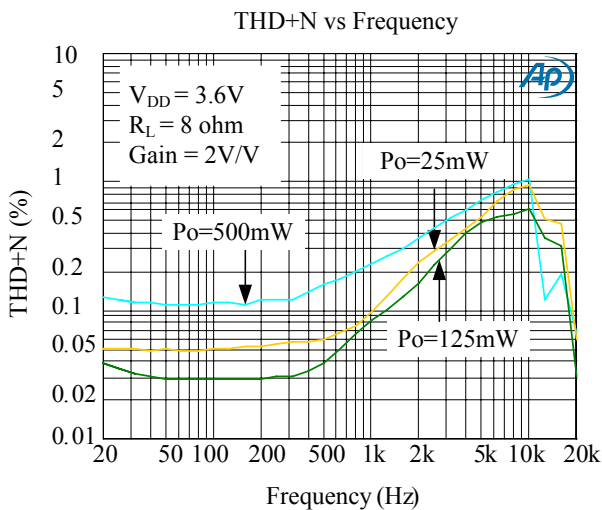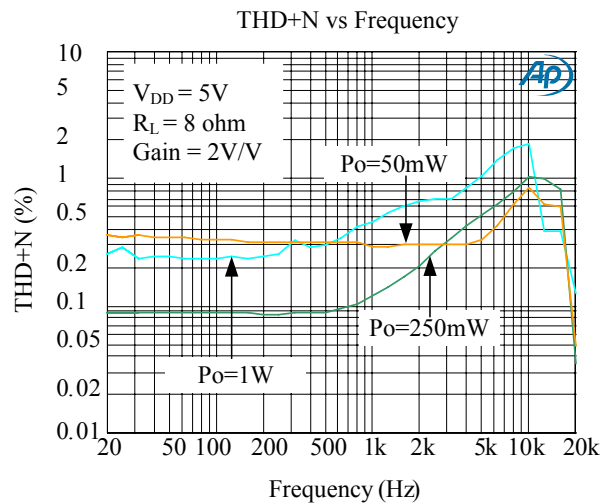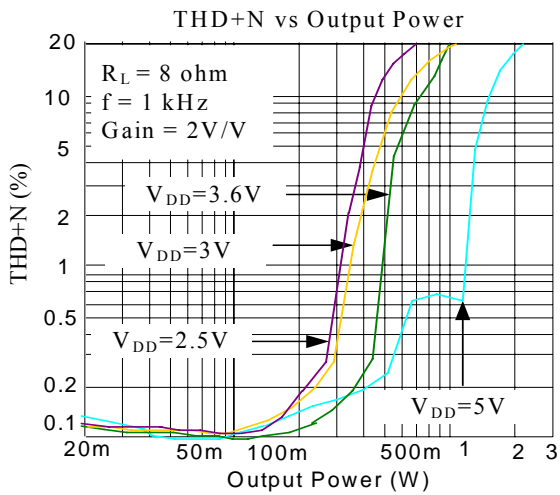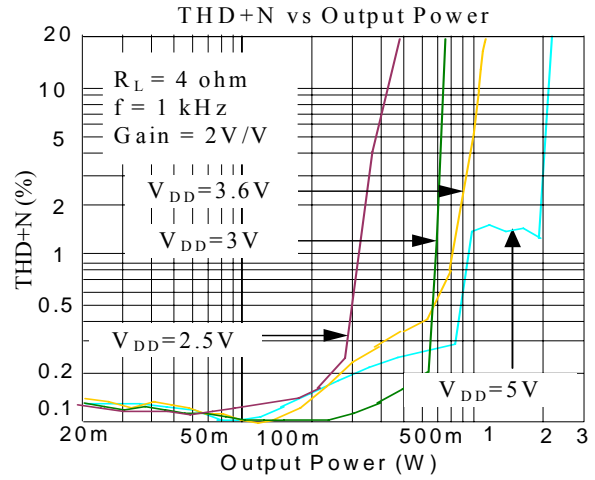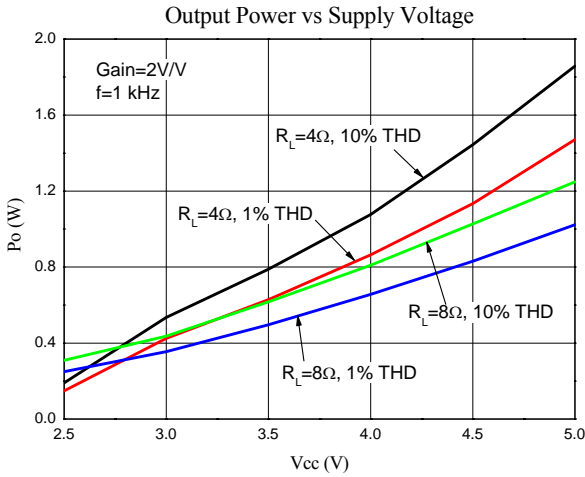


### TYPICAL PERFORMANCE CHARACTERISTICS

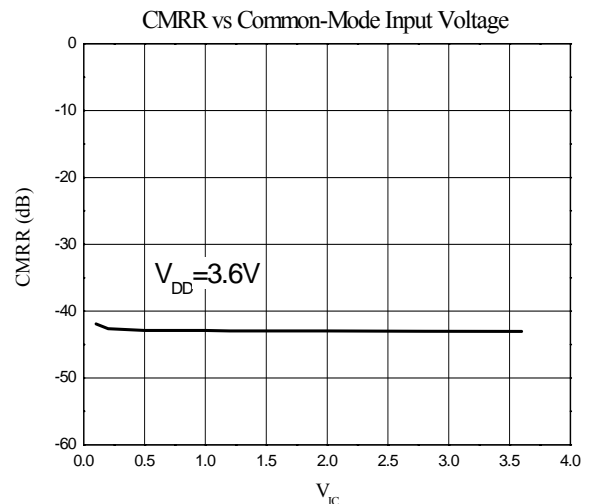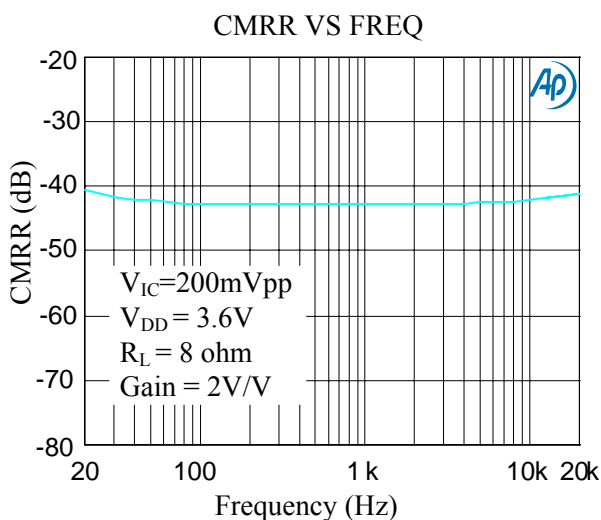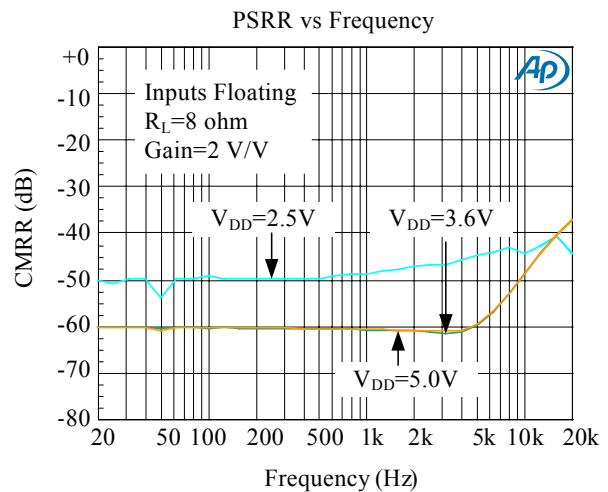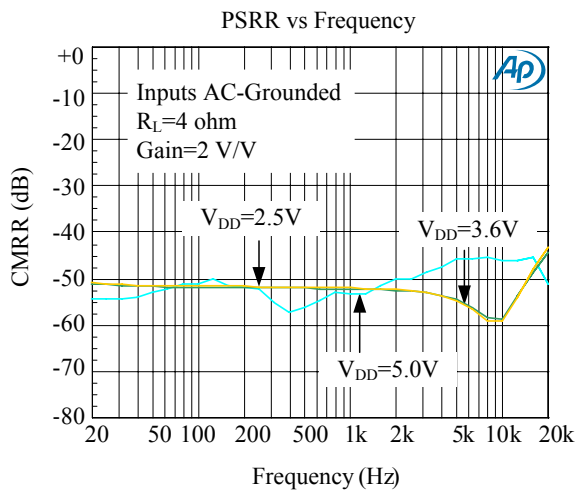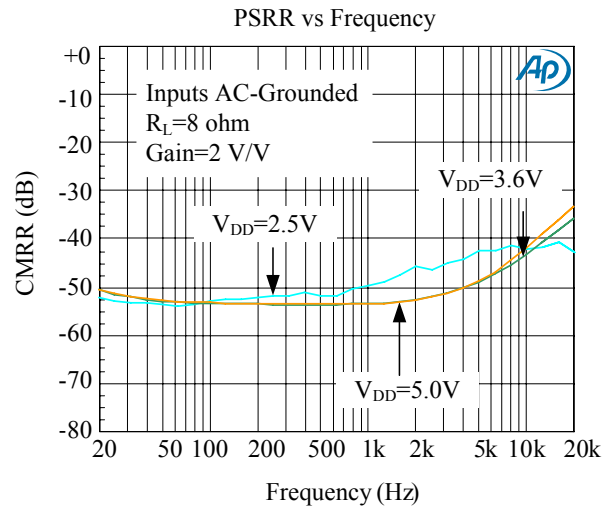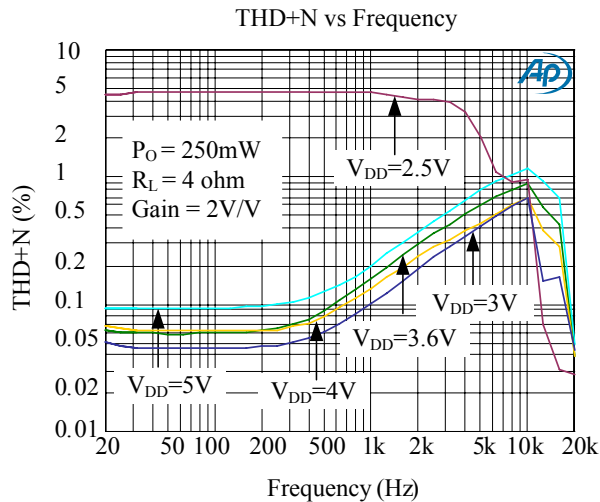





### SIMPLIFIED BLOCK DIAGRAM

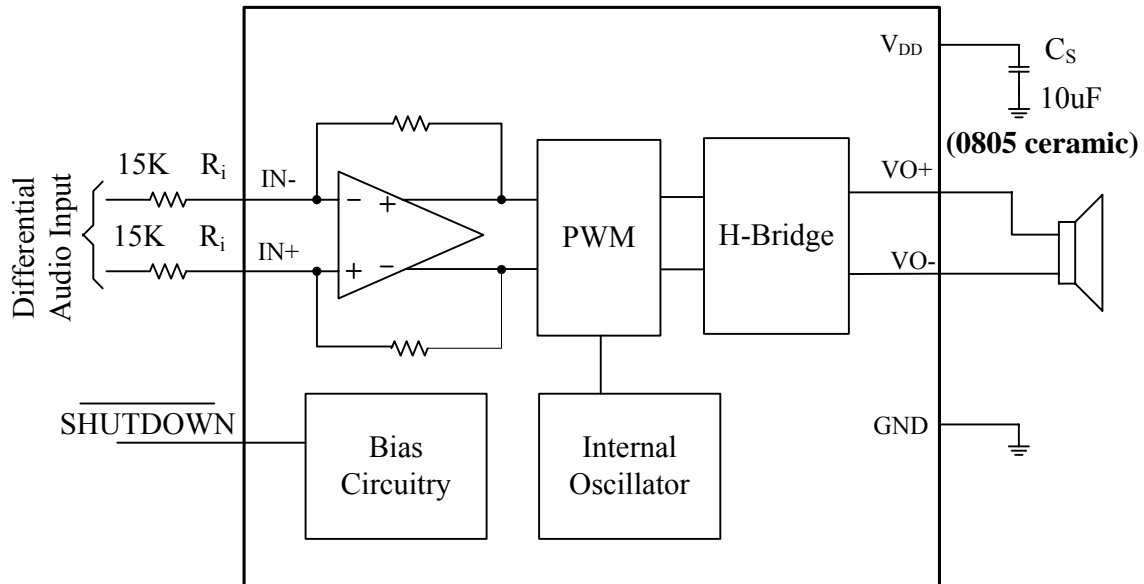

### APPLICATION INFORMATION

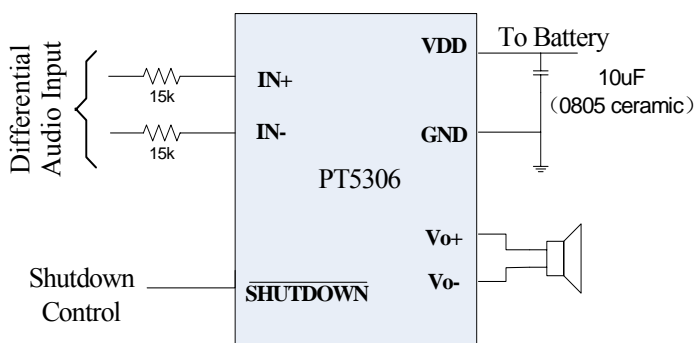

PT 5306 Application Schematic with Differential input

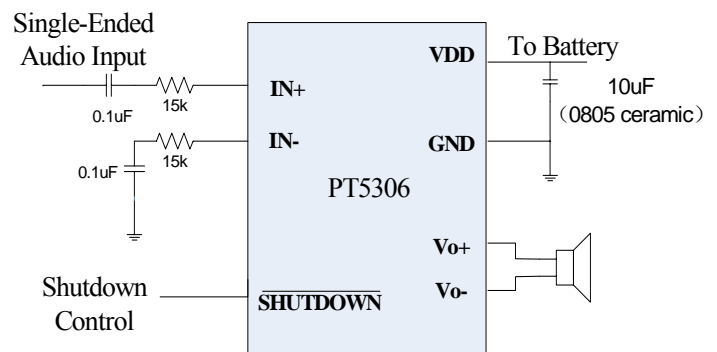

PT 5306 Application Schematic with Single Ended input Capacitors

### DECOUPLING CAPACITOR (C<sub>S</sub>)

The PT5306 is a high-performance Class-D audio amplifier that requires adequate power supply decoupling to ensure the efficiency is high and total harmonic distortion (THD) is low. For higher frequency transients, spikes, or digital hash on the line a good low equivalent-series-resistance (ESR) ceramic capacitor or tantalum capacitor, typically 10 $\mu$ F, placed as close as

possible to the device V<sub>DD</sub> lead works best. Placing this decoupling capacitor close to the PT5306 is important for the efficiency of the Class-D amplifier, because any resistance or inductance in the trace between the device and the capacitor can cause a loss in efficiency. For filtering lower-frequency noise signals, a 10 $\mu$ F or greater 0805 capacitor placed near the audio power amplifier would also help.

### INPUT CAPACITORS (C<sub>I</sub>)

The PT5306 does not require input coupling capacitors if the design uses a differential source that is biased from 0.5 V to V<sub>DD</sub> -0.8 V. If the input signal is not biased within the recommended common-mode input range, if high pass filtering is needed (see Figure above), or if using a single-ended source (see Figure above), input coupling capacitors C<sub>I</sub> are required.

The input capacitors and input resistors R<sub>I</sub> form a high-pass filter with the corner frequency, f<sub>c</sub>, determined in Equation 1.

$$f_c = \frac{1}{2\pi R_I C_I} \quad (1)$$

The value of the input capacitor is important to consider as it directly affects the bass (low frequency) performance of the circuit. Speakers in wireless phones cannot usually respond well to low frequencies, so the corner frequency can be set to block low frequencies in this application. Not using input capacitors can increase output offset.

Equation 2 is used to solve for the input coupling capacitance.

$$C_I = \frac{1}{2\pi R_I f_c} \quad (2)$$

If the corner frequency is within the audio band, the capacitors should have a tolerance of ±10% or better, because any mismatch in capacitance causes an impedance mismatch at the corner frequency and below.

### COMPONENT LOCATION

Place all the external components very close to the PT5306. Placing the decoupling capacitor, C<sub>S</sub>, close to the PT5306 is important for the efficiency of the Class-D amplifier. Any resistance or inductance in the trace between the device and the capacitor can cause a loss in efficiency.

### PCB LAYOUT CONSIDERATIONS

As output power increases, interconnect resistance (PCB traces and wires) between the amplifier, load and power supply create a voltage drop. The voltage loss on the traces between the PT5306 and the load results in

lower output power and decreased efficiency. Higher trace resistance between the supply and the PT5306 has the same effect as a poorly regulated supply, increase ripple on the supply line also reducing the peak output power. The effects of residual trace resistance increases as output current increases due to higher output power, decreased load impedance or both. To maintain the highest output voltage swing and corresponding peak output power, the PCB traces that connect the output pins to the load and the supply pins to the power supply should be as wide as possible to minimize trace resistance.

The use of power and ground planes will give the best THD+N performance. While reducing trace resistance, the use of power planes also creates parasitic capacitors that help to filter the power supply line.

The inductive nature of the transducer load can also result in overshoot on one or both edges, clamped by the parasitic diodes to GND and V<sub>DD</sub> in each case. From an EMI standpoint, this is an aggressive waveform that can radiate or conduct to other components in the system and cause interference. It is essential to keep the power and output traces short and well shielded if possible. Use of ground planes, beads, and micro-strip layout techniques are all useful in preventing unwanted interference.

As the distance from the PT5306 and the speaker increase, the amount of EMI radiation will increase since the output wires or traces acting as antenna become more efficient with length. What is acceptable EMI is highly application specific. Ferrite chip inductors placed close to the PT5306 may be needed to reduce EMI radiation. The value of the ferrite chip is very application specific.

### WHEN TO USE AN OUTPUT FILTER


Design the PT5306 without an output filter if the traces from amplifier to speaker are short. Wireless handsets and PDAs are great applications for class-D without a filter.

A ferrite bead filter often can be used if the design is failing radiated emissions without an LC filter, and the frequency-sensitive circuit is greater than 1 MHz. This


## 2.5W Filter-free Class D Audio Power Amplifier

is good for circuits that just have to pass FCC and CE because FCC and CE only test radiated emissions greater than 30 MHz. If choosing a ferrite bead, choose one with high impedance at high frequencies, but very low impedance at low frequencies.

Use an LC output filter if there are low-frequency (<1 MHz) EMI-sensitive circuits and/or there are long leads from amplifier to speaker.

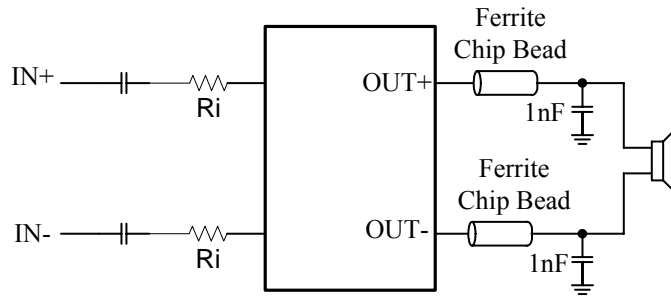


**Ferrite Chip Bead Filter**

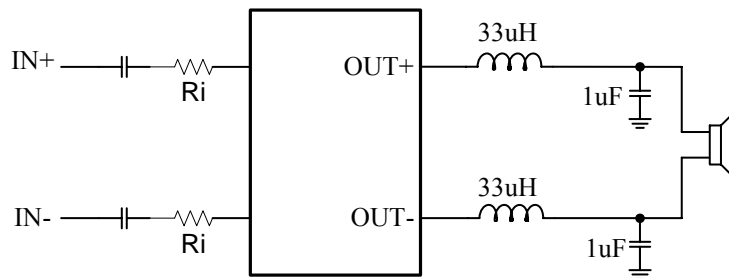

**Typical LC Output Filter, Cut-Off Frequency of 27k Hz**

### PACKAGE INFORMATION

#### SMD9 Package

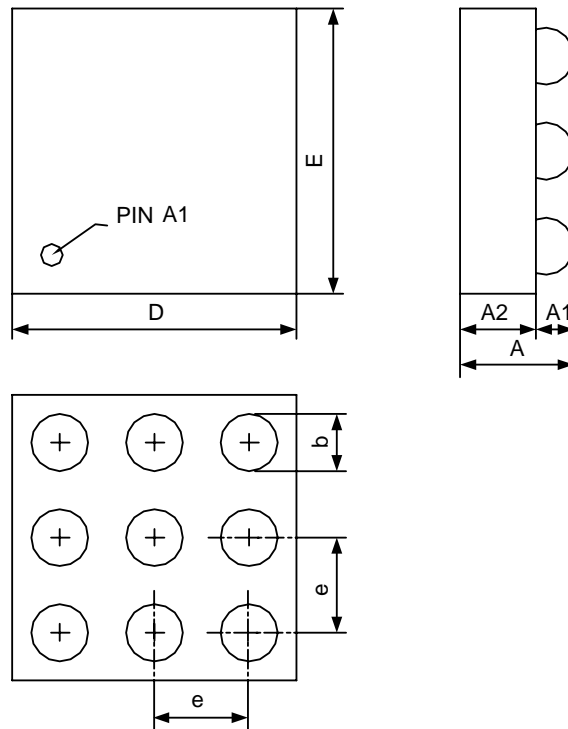

| SYMBOL | MILLIMETERS |       |
|--------|-------------|-------|
|        | MIN         | MAX   |
| A      | 0.635       | 0.735 |
| A1     | 0.209       | 0.249 |
| A2     | 0.426       | 0.486 |
| b      | 0.25        | 0.35  |
| D      | 1.47        | 1.53  |
| E      | 1.47        | 1.53  |
| e      | 0.50 BSC    |       |

PACKAGE INFORMATION

DFN-8 Package

