

1W Fully Differential Audio Power Amplifier with Shutdown Select

General Description

The EMA1903 is a fully differential audio power amplifier primarily designed for demanding applications in mobile phones and other portable communication device applications. It is capable of delivering 1 watt of continuous average power to an 8Ω BTL load with less than 1% distortion (THD+N) from a 5V_{DC} power supply.

The EMA1903 does not require output coupling capacitors or bootstrap capacitors, and therefore is ideally suited for mobile phone and other low voltage applications where minimal power consumption is a primary requirement.

The EMA1903 features a low-power consumption shutdown mode. To facilitate this, shutdown may be enabled by either logic high or low depending on mode selection. Driving the shutdown mode pin either high or low enables the shutdown select pin to be driven in a likewise manner to enable Shutdown. Additionally, the EMA1903 features an internal thermal shutdown protection mechanism.

The EMA1903 contains advanced pop & click circuitry which eliminates noises which would otherwise occur during turn-on and turn-off transitions.

The EMA1903 is unity-gain stable and can be configured by external gain-setting resistors.

Key Specifications

• Improved PSRR at 217Hz	70dB(typ)
• Power Output at 5.0V,8Ω & 1% THD	1W(typ)
• Power Output at 2.6V,8Ω & 1% THD	300mW(typ)
• Shutdown current	0.1μA (typ)

Features


- Available in space-saving WL-CSP package
- Fully differential amplification
- Ultra low current shutdown mode
- Can drive capacitive loads up to 500 pF
- Improved pop & click circuitry eliminates noises during turn-on and turn-off transitions
- 2.2 - 5.5V operation
- No output coupling capacitors, snubber networks or bootstrap capacitors required
- Unity-gain stable
- External gain configuration capability
- Shutdown high or low selectivity
- High CMRR

Applications


- Mobile phones
- PDAs
- Portable electronic devices

Connection Diagram

WL-CSP Package

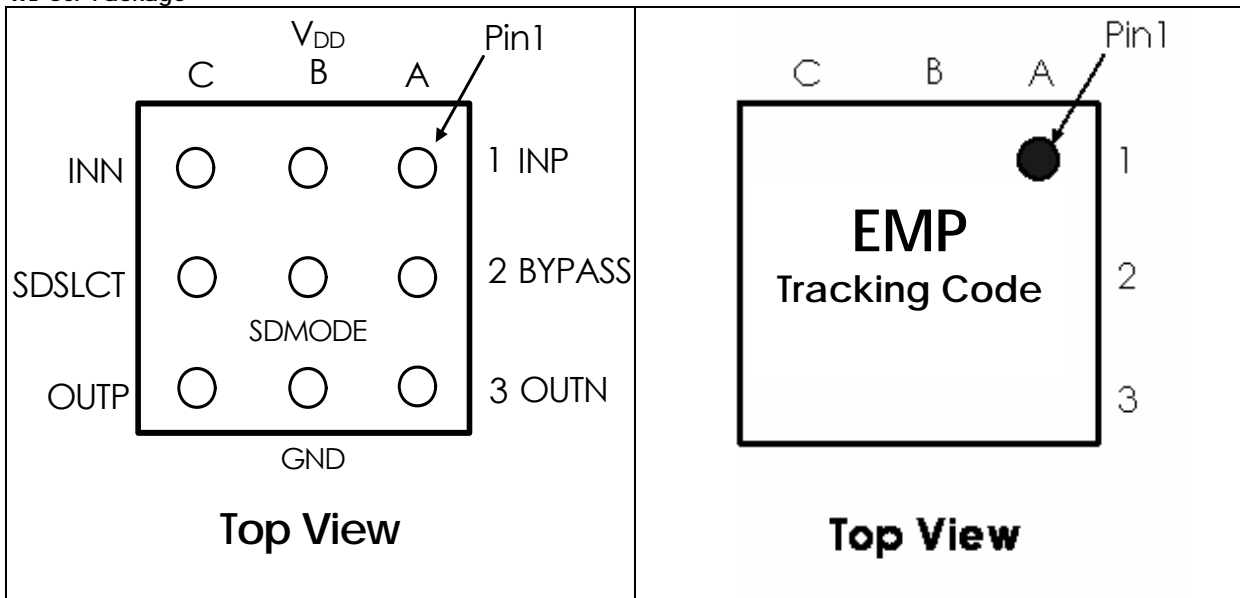


Remark: (Unit: μm)

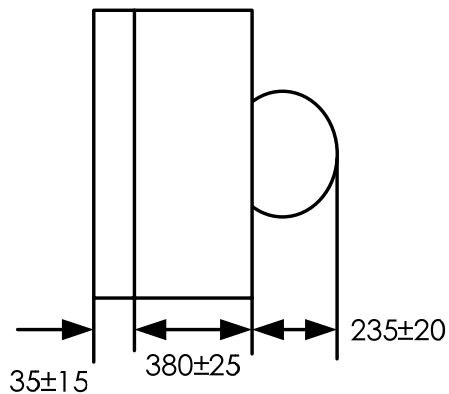

EMA1903-50WL09GRR/NRR

- | | |
|------|----------------------------------|
| 50 | 5.0V Operation |
| WL09 | WL_CSP Package |
| GRR | RoHS (Pb Free) |
| | Rating: -40 to 85°C |
| | Package in Tape & Reel |
| NRR | RoHS & Halogen free (By Request) |
| | Rating: -40 to 85°C |
| | Package in Tape & Reel |

Order, Mark & Packing Information

Package	Product ID	Marking	Packing
WL-CSP	EMA1903-50WL09GRR	 <p>The marking diagram shows a square with a dot in the top right corner. The top edge is labeled 'C B A' from left to right. The right edge is labeled '1 2 3' from top to bottom. The text 'EMP' is centered in the square, with 'Tracking Code' below it. A callout box labeled 'END DOT' points to the dot.</p>	3K units Tape & Reel

Typical Application

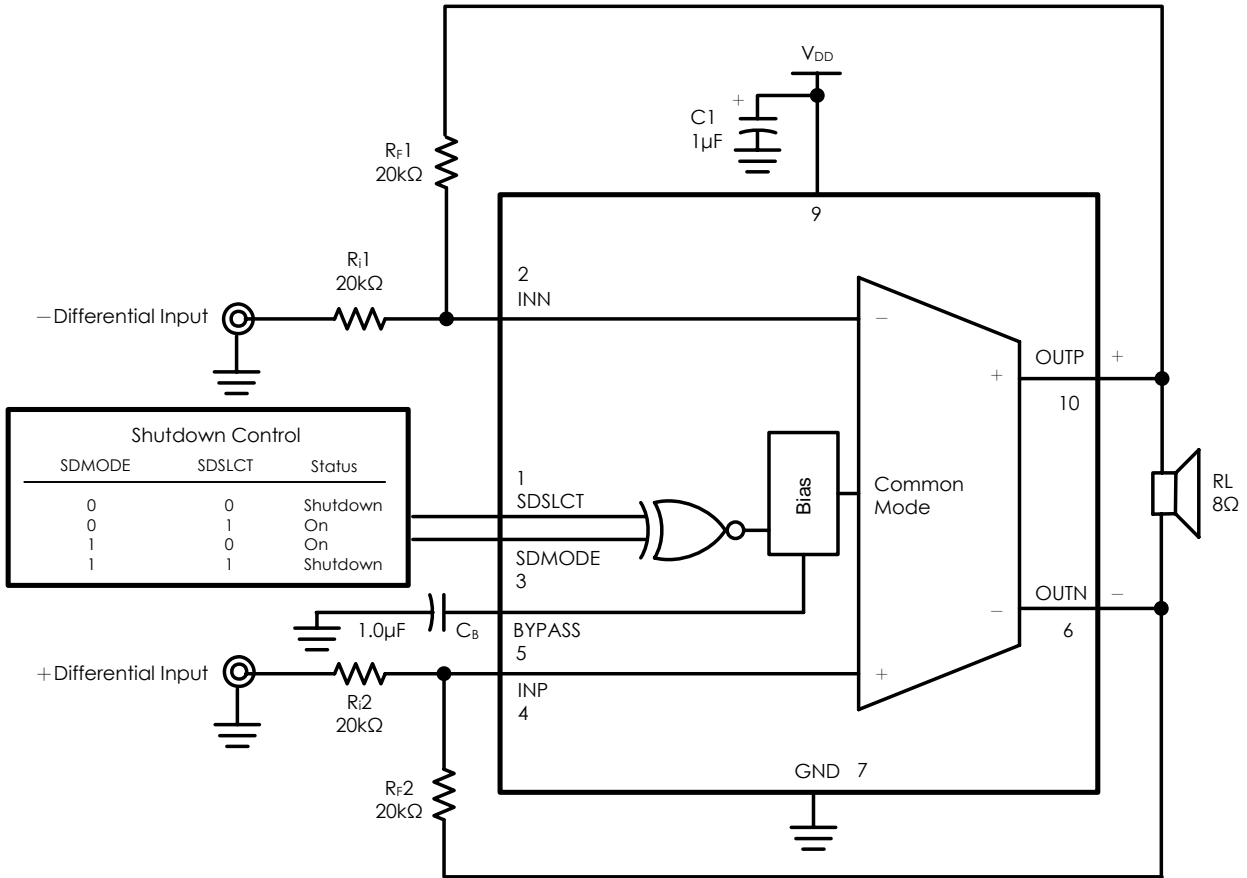


FIGURE 1. Typical Audio Amplifier Application Circuit

Absolute Maximum Ratings

Supply Voltage	6.0V	Thermal Resistance	
Storage Temperature	-65°C to +150°C	θ_{JA} (WL-CSP)	180°C/W
Input Voltage	-0.3V to VDD +0.3V	Operating Ratings	
Power Dissipation	Internally Limited	Temperature Range	-40°C ≤ TA ≤ 85°C
ESD Susceptibility	HBM 1.5KV MM 200V	Supply Voltage	2.2V ≤ VDD ≤ 5.5V
Junction Temperature	150°C		

Electrical Characteristics V_{DD} = 5V

The following specifications apply for V_{DD} = 5V, A_V = 1 and R_L = 8Ω unless otherwise specified. Limits apply for T_A = 25°C.



Symbol	Parameter	Conditions	Conditions		Units (Limits)
			Typical	Limit	
I _{DD}	Quiescent Power Supply Current	V _{IN} = 0V, I _o = 0A	1.6	4	mA (max)
I _{SD}	Shutdown Current	V _{SDNB} =GND	0.1	1	μA (max)
P _O	Output Power	THD = 1 % (max), f = 1kHz	1	0.9	W (min)
THD+N	Total Harmonic Distortion + Noise	P _O = 0.4 Wrms ; f = 1kHz	0.008		%
PSRR	Power Supply Rejection Ratio	V _{ripple} = 200mV sine p-p			dB
		f = 217Hz (Un-terminated input)	73		
		f = 1kHz (Un-terminated input)	73		
		f = 217Hz (10Ω terminated input)	70		
		f = 1kHz (10Ω terminated input)	70		
CMRR	Common Mode Rejection Ratio	f = 217Hz	64		dB



Electrical Characteristics V_{DD} = 2.6V





The following specifications apply for V_{DD} = 2.6V, A_V = 1 and R_L = 8Ω unless otherwise specified. Limits apply for T_A = 25°C.

Symbol	Parameter	Conditions	Conditions		Units (Limits)
			Typical	Limit	
I _{DD}	Quiescent Power Supply Current	V _{IN} = 0V, I _o = 0A	1.3	2	mA (max)
I _{SD}	Shutdown Current	V _{SDNB} =GND	0.1	1	μA (max)
P _O	Output Power	THD = 1 % (max), f = 1kHz R _L = 4Ω	0.4	0.38	W (min)
		R _L = 8Ω	0.3	0.28	
THD+N	Total Harmonic Distortion + Noise	P _O = 0.3 Wrms ; f = 1kHz, 4Ω	0.02		%
		P _O = 0.25 Wrms ; f = 1kHz, 8Ω	0.01		
PSRR	Power Supply Rejection Ratio	V _{ripple} = 200mV sine p-p			dB
		f = 217Hz (Un-terminated input)	73		
		f = 1kHz (Un-terminated input)	73		
		f = 217Hz (10Ω terminated input)	65		
		f = 1kHz (10Ω terminated input)	65		
CMRR	Common Mode Rejection Ratio	f = 217Hz	60		dB


Typical Performance Characteristics

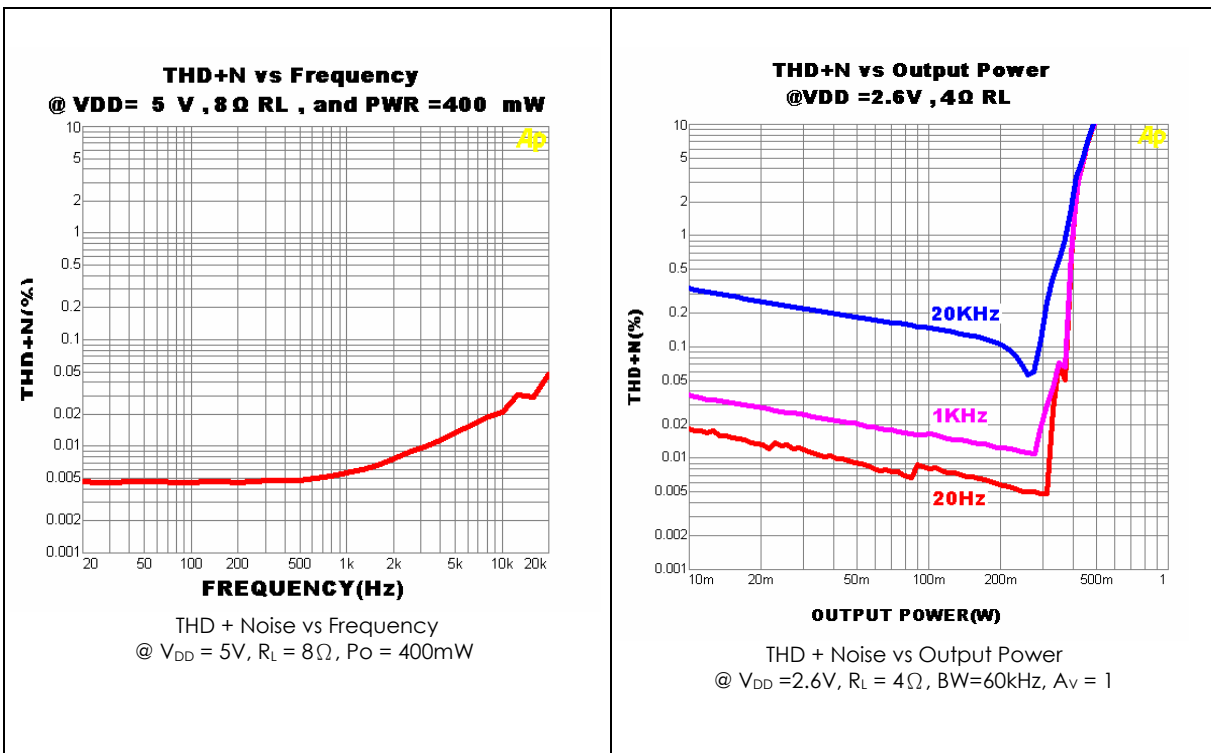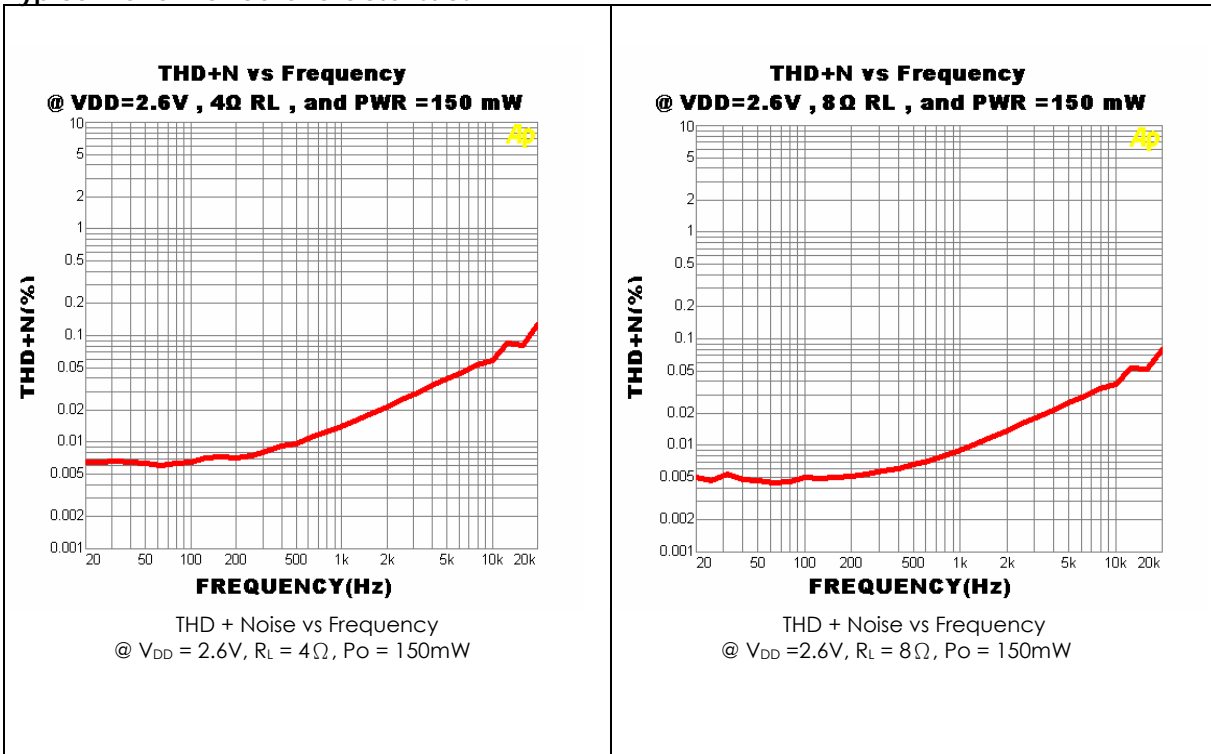

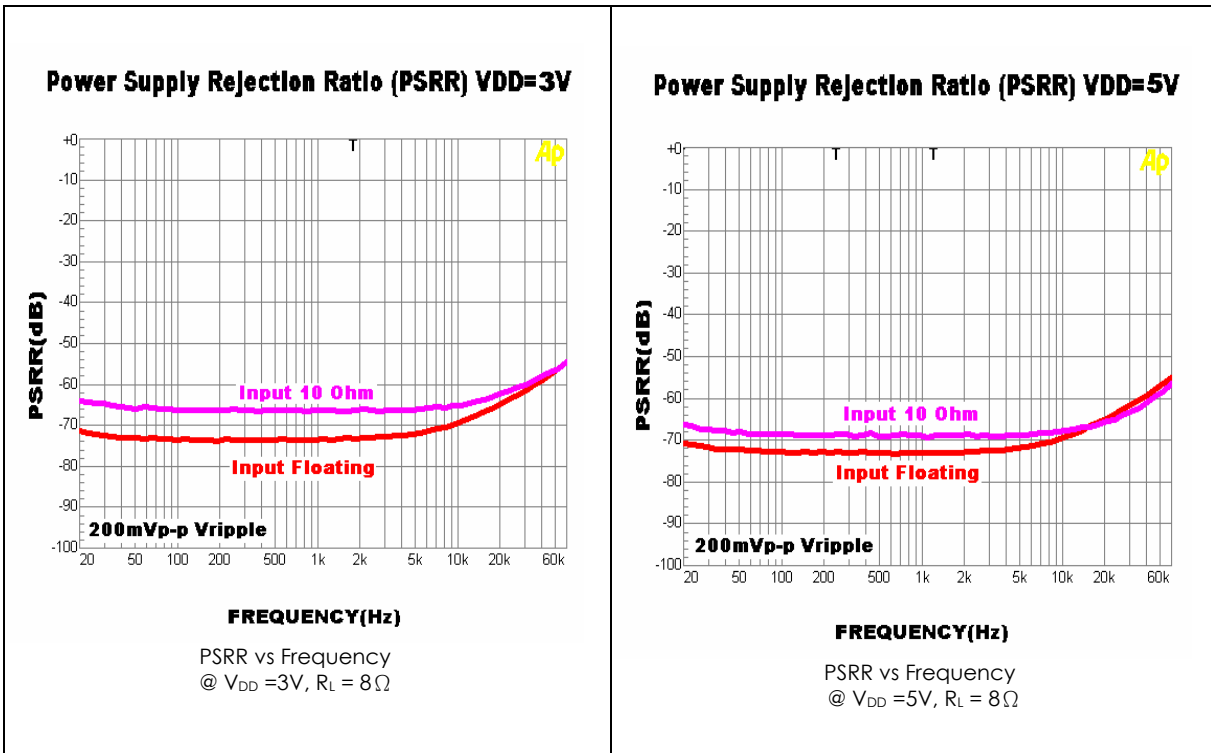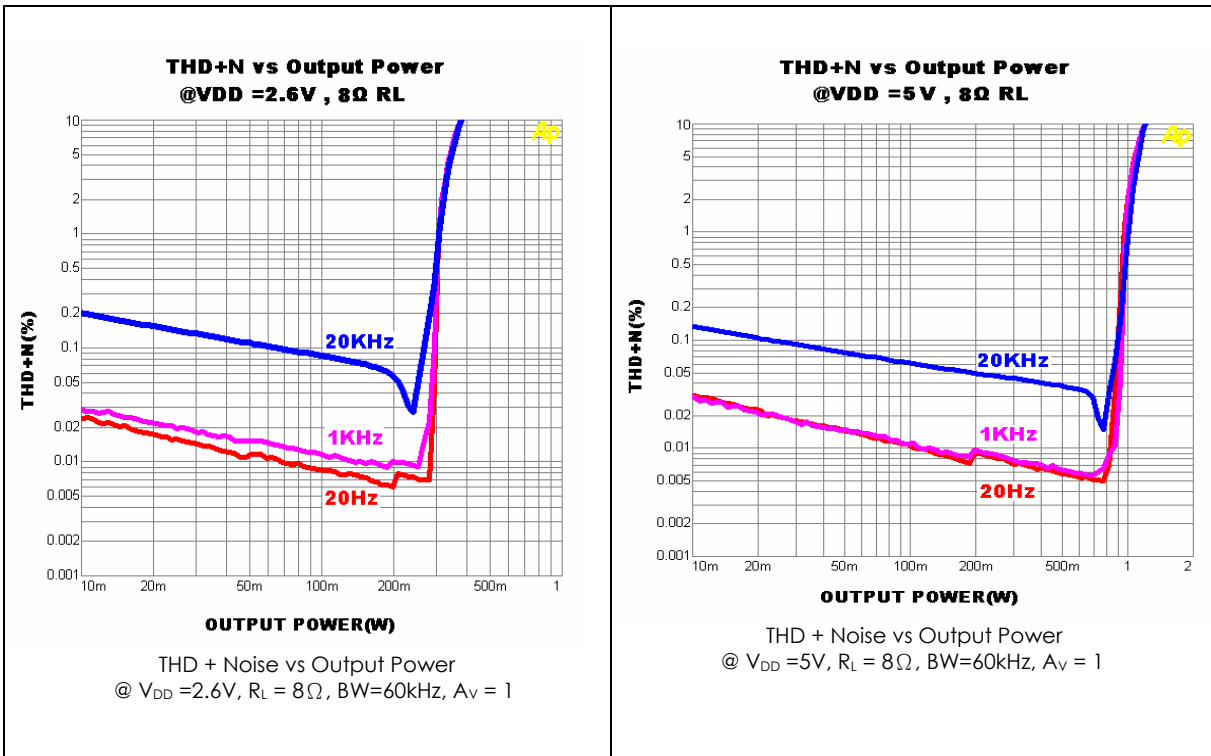

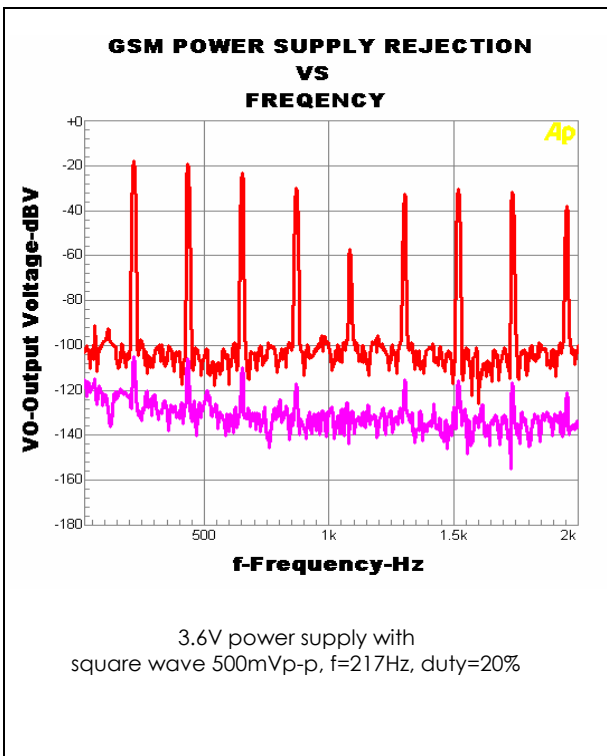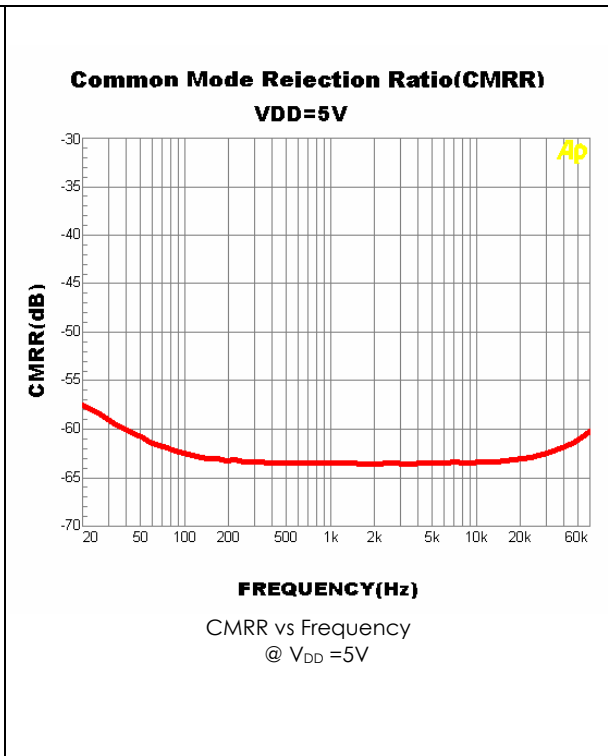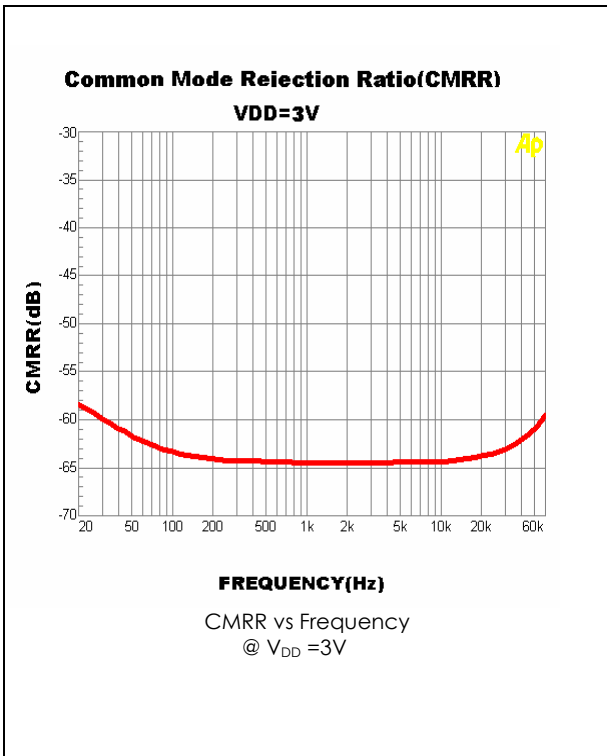

Physical Dimensions (WL-CSP Package)

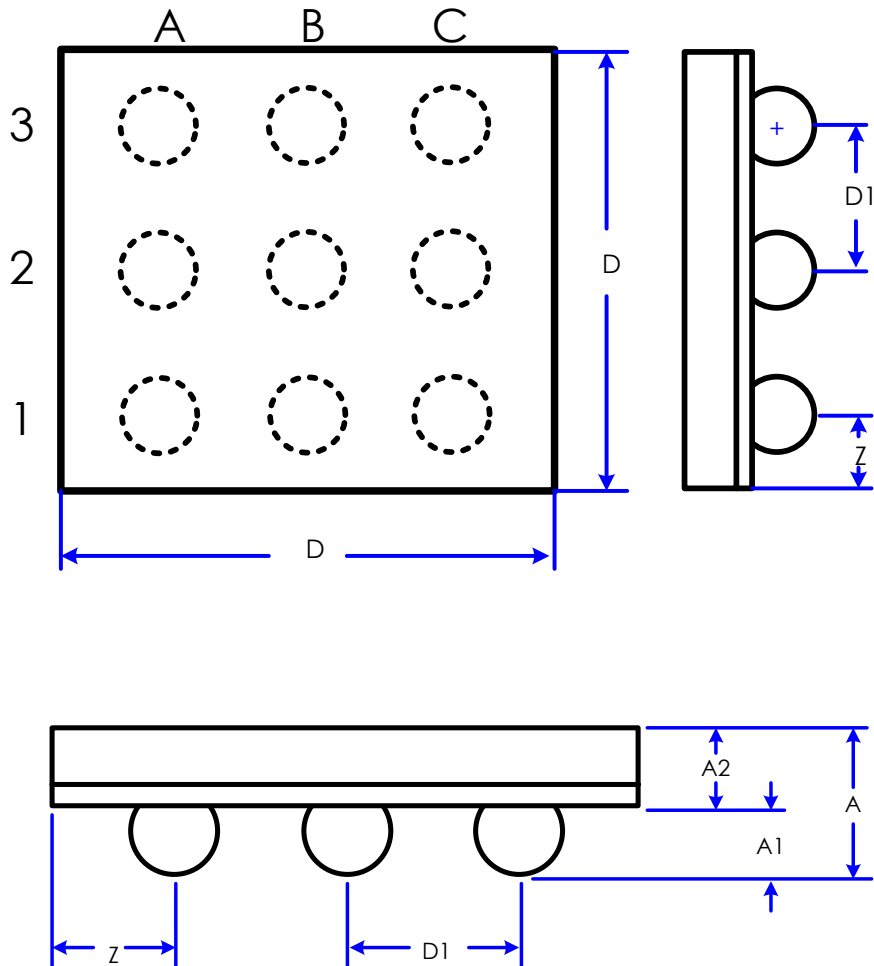

Symbol	Dimensions in millimeter		
	min.	typ.	max.
A	0.585	0.650	0.715
A1	0.210	0.235	0.260
A2	0.355	0.380	0.405
D	1.420	1.460	1.500
D1	0.5		
Z	0.23		

Revision History

Revision	Date	Description
2.0	2009.05.08	EMP transferred from version 1.0

Important Notice

All rights reserved.

No part of this document may be reproduced or duplicated in any form or by any means without the prior permission of ESMT.

The contents contained in this document are believed to be accurate at the time of publication. ESMT assumes no responsibility for any error in this document, and reserves the right to change the products or specification in this document without notice.

The information contained herein is presented only as a guide or examples for the application of our products. No responsibility is assumed by ESMT for any infringement of patents, copyrights, or other intellectual property rights of third parties which may result from its use. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of ESMT or others.

Any semiconductor devices may have inherently a certain rate of failure. To minimize risks associated with customer's application, adequate design and operating safeguards against injury, damage, or loss from such failure, should be provided by the customer when making application designs.

ESMT's products are not authorized for use in critical applications such as, but not limited to, life support devices or system, where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. If products described here are to be used for such kinds of application, purchaser must do its own quality assurance testing appropriate to such applications.