

---

## - 2.7W Mono Fully Differential Audio Power Amplifier

### General Description

The EMA2004 is a 2.7W mono fully differential amplifier designed to drive a speaker with at least 4Ω impedance while consuming only 20 mm<sup>2</sup> total PCB area in most applications. The device operates from 2.5 V to 5.5 V, drawing only 5mA of quiescent supply current. The EMA2004 is available in the space-saving 3 mm x 3 mm TDFN package.

The EMA2004 is ideal for PDA/smart phone applications due to features such as -70dB supply voltage rejection from 20 Hz to 2 kHz, improved RF rectification immunity, small PCB area, and a fast startup with minimal pop.

### Features


- Designed for Wireless or Cellular Handsets and PDAs
- 2.7 W Into 4Ω From a 5-V Supply at THD = 10% (Typ)
- Low Supply Current: 5mA (Typ) at 5 V
- Shutdown Current: 0.1 μA (Typ)
- Fast Startup With Minimal Pop
- Only Three External Components
- Improved PSRR (-70 dB) and Wide Supply Voltage (2.5 V to 5.5 V) for Direct Battery Operation
- Fully Differential Design Reduces RF Rectification
- -63 dB CMRR Eliminates Two Input Coupling Capacitors
- Pin to Pin Compatible With TPA6204A1 in TDFN Package
- Available in 3 mm X 3 mm TDFN Package

### Applications


- Ideal for Wireless Handsets
- PDAs
- Notebook Computers

## Connection Diagram

MSOP Package

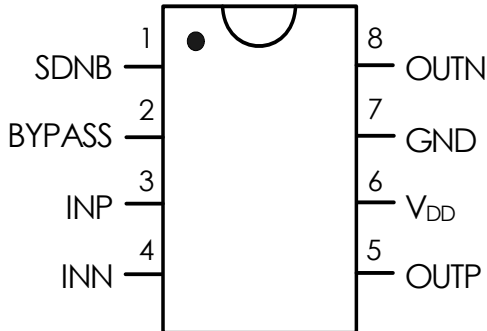

TDFN Package

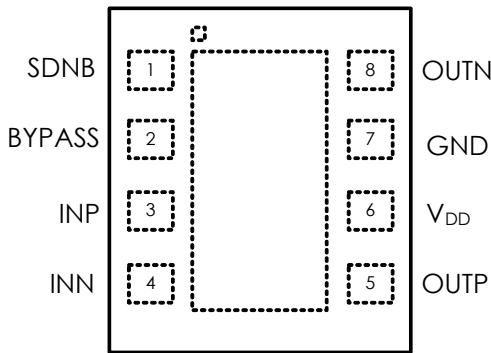

## Order information

EMA2004-50MA08GRR/NRR

50	5.0V Operation
MA08	MSOP-8 Package
GRR	RoHS (Pb Free)
	Rating: -40 to 85°C
	Package in Tape & Reel
NRR	RoHS & Halogen free (By Request)
	Rating: -40 to 85°C
	Package in Tape & Reel


EMA2004-50FF08NRR

50	5.0V Operation
FF08	TDFN-8 Package
NRR	RoHS & Halogen free
	Rating: -40 to 85°C
	Package in Tape & Reel

## Order, Mark & Packing Information


Package	Product ID	Marking	Packing
MSOP-8	EMA2004-50MA08GRR		3K units Tape & Reel
TDFN-8	EMA2004-50FF08NRR		5K units Tape & Reel

## Typical Application

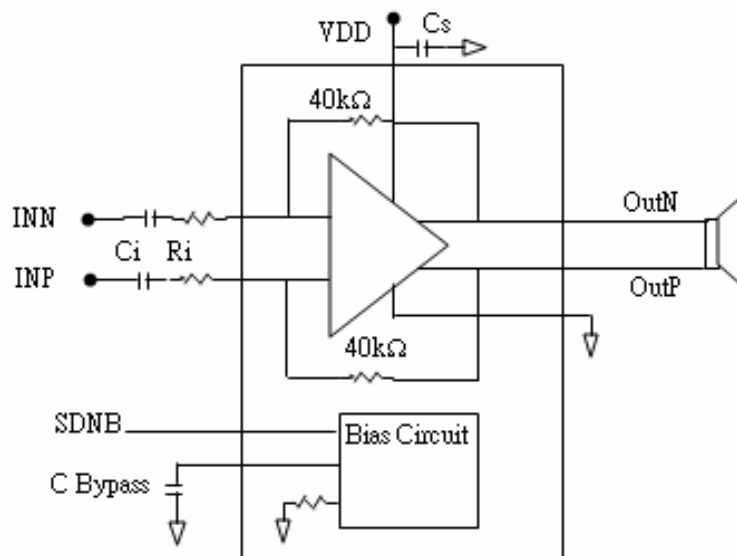

$R_i=40k\Omega$ ,  
 $C_i=0.39\mu F$ ,  
 $C_s=1\mu F$   
 $C_{(BYPASS)}=0.22\mu F$

FIGURE 1. Typical Audio Amplifier Application Circuit with differential input

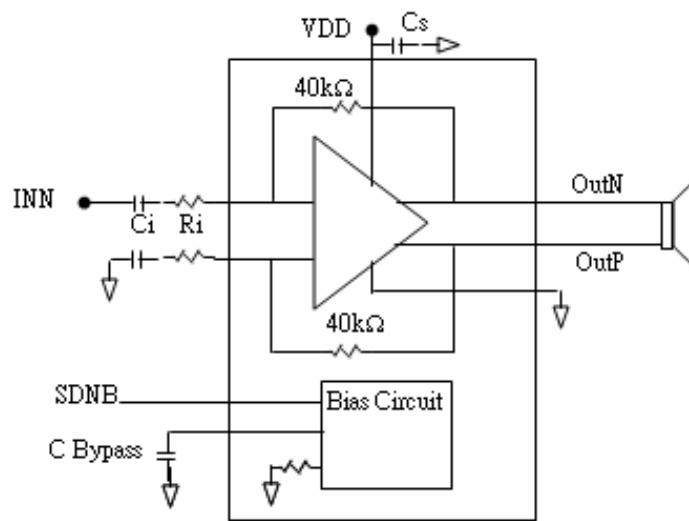

$R_i=40k\Omega$ ,  
 $C_i=0.22\mu F$ ,  
 $C_s=1\mu F$   
 $C_{(BYPASS)}=0.22\mu F$

FIGURE 2. Typical Audio Amplifier Application Circuit with single-ended input

## Absolute Maximum Ratings

Supply Voltage	6.0V	Thermal Resistance	
Storage Temperature	-65°C to +150°C	$\theta_{JA}$ (MSOP)	190°C/W
Input Voltage	-0.3V to VDD +0.3V	$\theta_{JA}$ (TDFN)	160°C/W
Power Dissipation	Internally Limited	Operating Ratings	
ESD Susceptibility	HBM 1.5KV MM 200V	Temperature Range	-40°C $\leq$ TA $\leq$ 85°C
Junction Temperature	150°C	Supply Voltage	2.2V $\leq$ VDD $\leq$ 5.5V

## Electrical Characteristics V<sub>DD</sub> = 5V

The following specifications apply for V<sub>DD</sub> = 5V, A<sub>V</sub> = 1 and R<sub>L</sub> = 8Ω unless otherwise specified. Limits apply for T<sub>A</sub> = 25°C.





Symbol	Parameter	Conditions	Conditions		Units
			Typical	Limit	
I <sub>DD</sub>	Quiescent Power Supply Current	V <sub>IN</sub> = 0V, I <sub>o</sub> = 0A	5	8	mA
I <sub>SD</sub>	Shutdown Current	V <sub>SDNB</sub> = GND	0.1	1	μA
V <sub>OS</sub>	Output offset voltage	V <sub>I</sub> = 0V differential, A <sub>V</sub> = 1 V/V, V <sub>DD</sub> = 5.5 V	1	5	mV
P <sub>O</sub>	Output Power	THD+N = 10 %(max), f = 1kHz R <sub>L</sub> = 4Ω R <sub>L</sub> = 8Ω	2.7 1.7		W
		THD+N = 1%(max), f = 1kHz R <sub>L</sub> = 4Ω R <sub>L</sub> = 8Ω	2.1 1.4		
THD+N	Total Harmonic Distortion + Noise	V <sub>DD</sub> = 3.6V, R <sub>L</sub> = 8Ω, f = 1kHz P <sub>O</sub> = 0.6 Wrms P <sub>O</sub> = 0.25 Wrms P <sub>O</sub> = 0.1 Wrms	0.007 0.01 0.017		%
PSRR	Power Supply Rejection Ratio	V <sub>ripple</sub> = 200mV sine p-p, input ac-grounded			dB
		f = 217Hz	-70		
		f = 20 to 20kHz	-65		
CMRR	Common Mode Rejection Ratio	V <sub>DD</sub> = 3.6V, V <sub>IC</sub> = 1V <sub>PP</sub> , f = 217Hz	60		dB


## Electrical Characteristics $V_{DD} = 2.5V$

The following specifications apply for  $V_{DD}=2.5V, A_V=1$  and  $R_L=8\Omega$  unless otherwise specified. Limits apply for  $T_A = 25^\circ C$ .

Symbol	Parameter	Conditions	Conditions		Units
			Typical	Limit	
$I_{DD}$	Quiescent Power Supply Current	$V_{IN} = 0V, I_o = 0A$	4	8	mA
$I_{SD}$	Shutdown Current	$V_{SDNB}=GND$	0.1	1	$\mu A$
$P_o$	Output Power	THD+N = 10 %(max), f = 1kHz $R_L = 4\Omega$ $R_L = 8\Omega$	0.62 0.4		W
		THD+N = 1%(max), f = 1kHz $R_L = 4\Omega$ $R_L = 8\Omega$	0.5 0.3		
PSRR	Power Supply Rejection Ratio	$V_{ripple}=200mV$ sine p-p, input ac-grounded			dB
		f=217Hz	-70		
		f=20 to 20kHz	-65		

## Typical Performance Characteristics

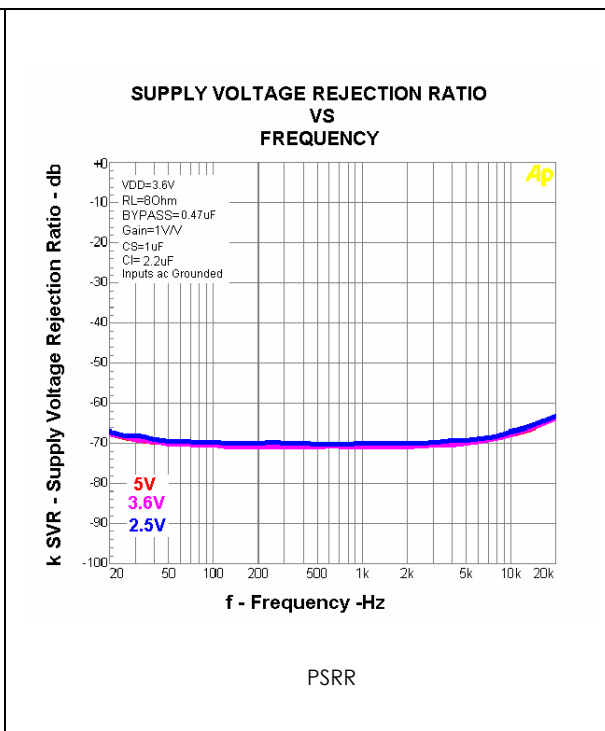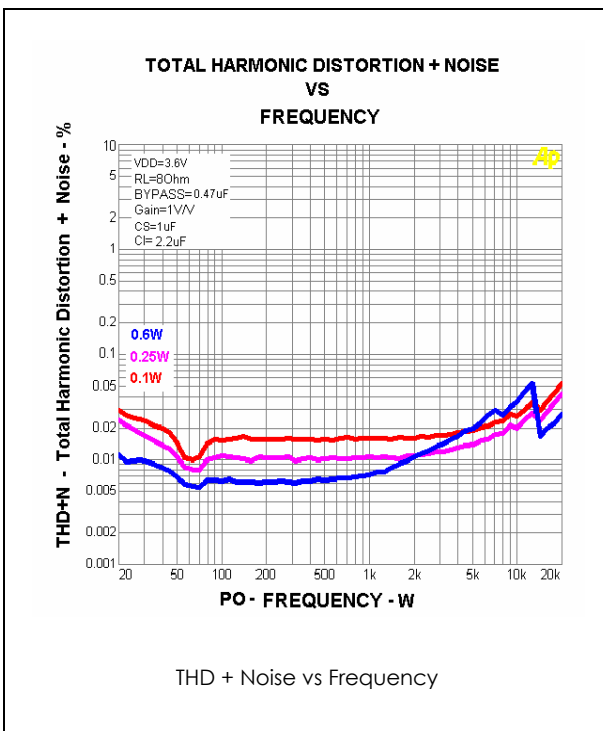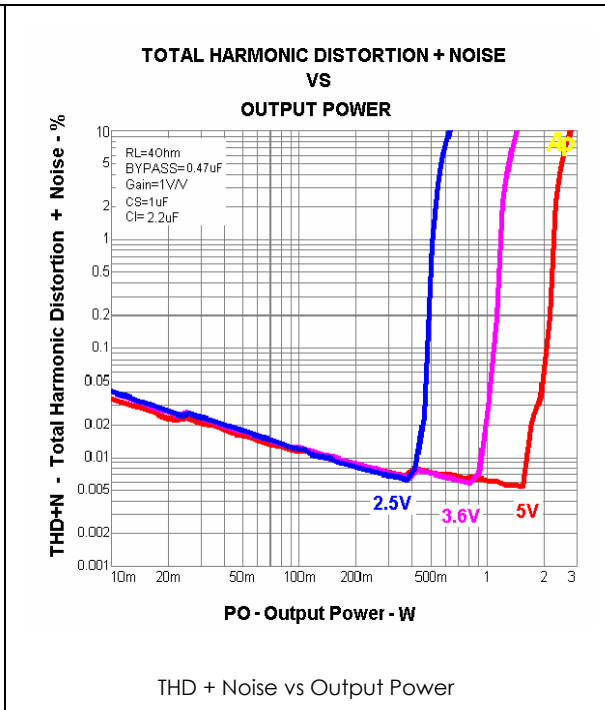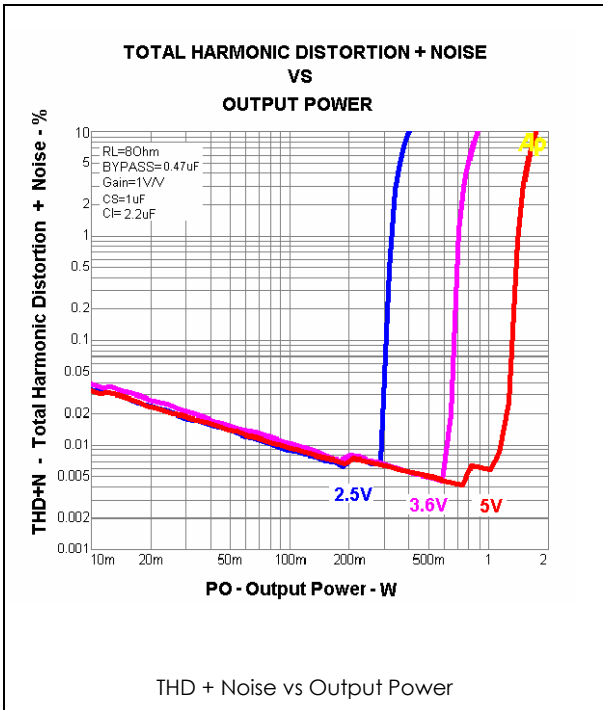


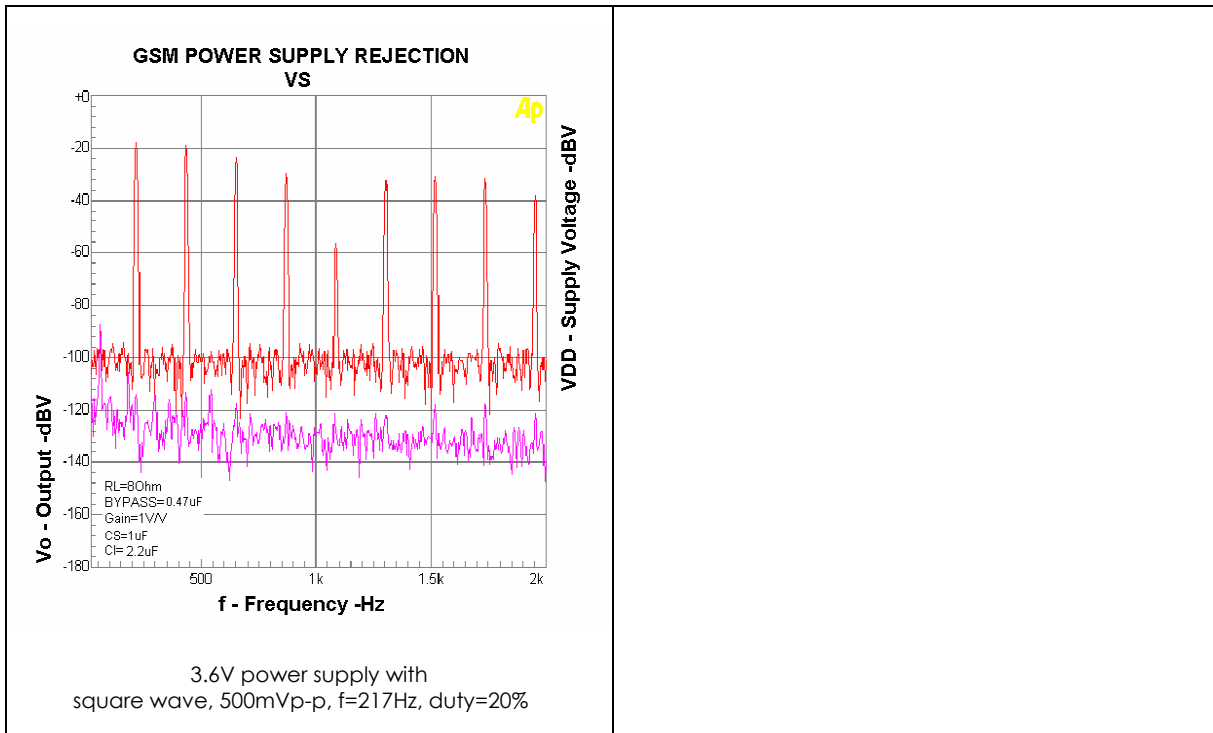




## Physical Dimensions


MSOP-8 Plastic Package

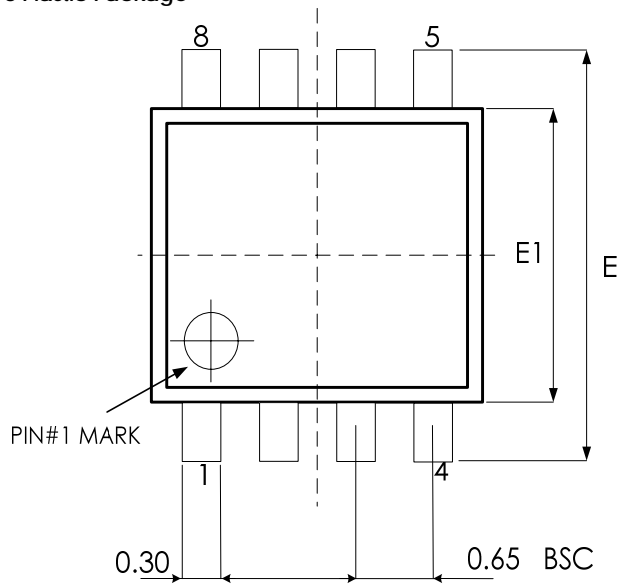


**TOP VIEW**

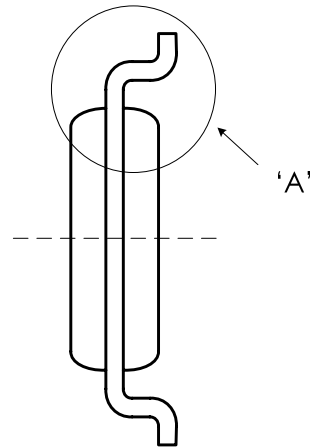

**SIDE VIEW**

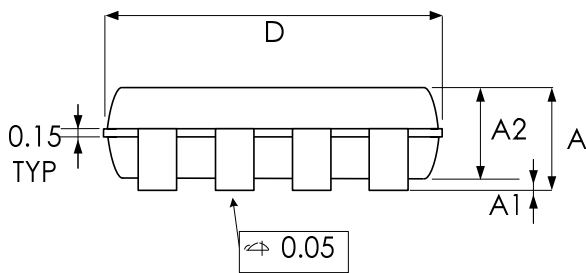

**BOTTOM VIEW**

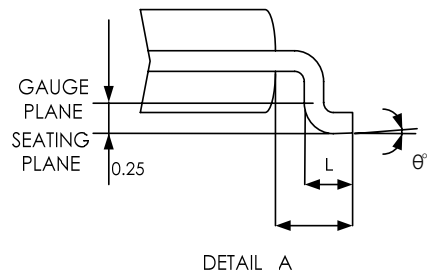


DETAIL A

SYMBOLS	MIN.	NOM.	MAX.
A	-	-	1.10
A1	0.00	-	0.15
A2	0.75	0.85	0.95
D	3.00 BSC		
E	4.90 BSC		
E1	3.00 BSC		
L	0.40	0.60	0.80
L1	0.95 REF		
$\theta^\circ$	0	-	8

UNIT: MM

## TDFN-8

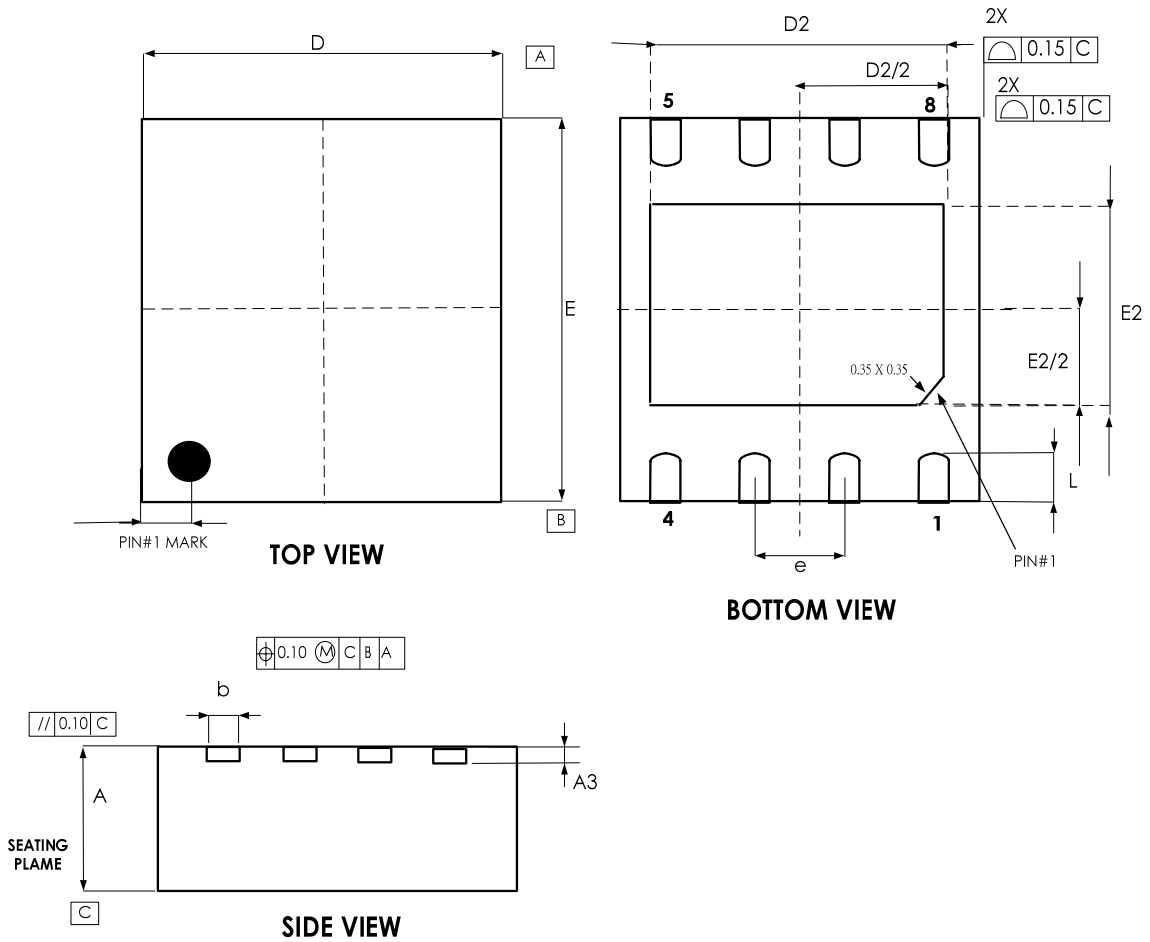

SYMBOL	COMMON					
	DIMENSIONS MILLIMETER			DIMENSIONS INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.028	0.030	0.031
A3	0.203 BSC			0.008 BSC		
b	0.25	0.30	0.35	0.010	0.012	0.014
D	3.00 BSC			0.118BSC		
D2	1.60	-	2.50	0.063	-	0.098
E	3.00 BSC			0.118BSC		
E2	1.35	-	1.75	0.053	-	0.069
e	0.650 BSC			0.026 BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

## Revision History

Revision	Date	Description
4.0	2009.07.15	EMP transferred from version 3.1
4.1	2010.10.07	Package dimension update

## Important Notice

All rights reserved.

No part of this document may be reproduced or duplicated in any form or by any means without the prior permission of ESMT.

The contents contained in this document are believed to be accurate at the time of publication. ESMT assumes no responsibility for any error in this document, and reserves the right to change the products or specification in this document without notice.

The information contained herein is presented only as a guide or examples for the application of our products. No responsibility is assumed by ESMT for any infringement of patents, copyrights, or other intellectual property rights of third parties which may result from its use. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of ESMT or others.

Any semiconductor devices may have inherently a certain rate of failure. To minimize risks associated with customer's application, adequate design and operating safeguards against injury, damage, or loss from such failure, should be provided by the customer when making application designs.

ESMT's products are not authorized for use in critical applications such as, but not limited to, life support devices or system, where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. If products described here are to be used for such kinds of application, purchaser must do its own quality assurance testing appropriate to such applications.