



# SP6035

## High Performance Synchronous Rectifier Driver

### DESCRIPTION

SP6035 is a high performance and tightly integrated secondary side synchronous rectifier for switching mode power supply system. It combines a low  $R_{dson}$  N-channel MOSFET to emulate the traditional diode rectifier at the secondary side of Flyback converter, The fundamental of SP6035 synchronous rectifier (SR) driver IC is based on our U.S. patented methods that utilize the principle of “prediction” logic circuit. The IC deliberates previous cycle timing to control the SR in present cycle by “predictive” algorithm that makes adjustments to the turn-off time, in order to achieve maximum efficiency and avoid cross-conduction at the same time. The SP6035 is capable to adapt in almost all existing Resonance converters with no adjustment required.


### FEATURES

- Offers efficiency improvement over Schottky Diode.
- Low Standby Power to meet DOE Lot 6 requirement.
- Secondary-side synchronous rectifier optimized for output system.
- Build-in 60V SR MOSFET with low  $R_{dson}$
- Operating frequency up to 300 KHz.
- Synchronize to transformer secondary voltage waveform.
- Internal over voltage protection


### APPLICATIONS

- Switching Mode Power Supply (CCM&DCM&QR)
- Storage area network power supplies
- Telecommunication converters
- Embedded systems
- Industrial & commercial systems using high current processors
- Power converters to meet Lot 6 requirement

### PIN CONFIGURATION (TO-252-5L)

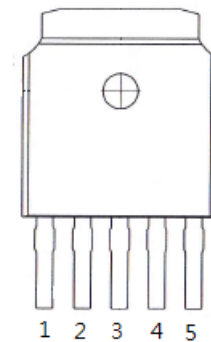

### PART MARKING


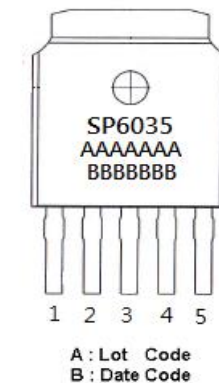




# SP6035

## High Performance Synchronous Rectifier Driver

### TYPICAL APPLICATION CIRCUIT

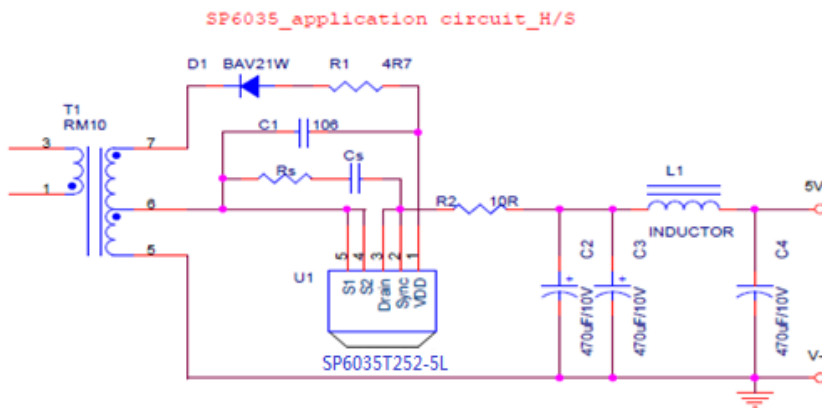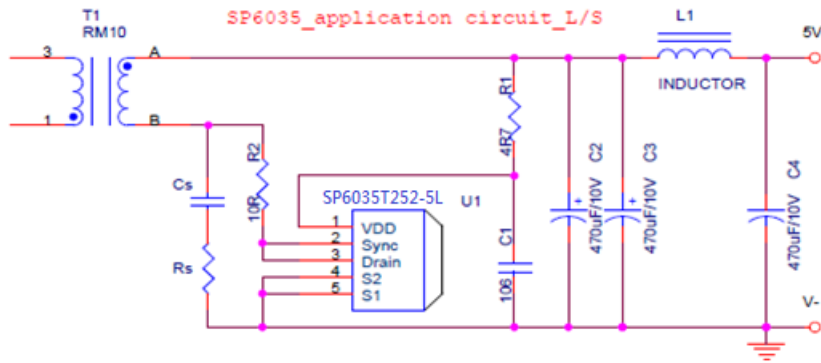

### PIN DESCRIPTION

Pin	Symbol	Description
1	Vdd	DC supply voltage.
2	SYNC	Synchronized signal from Vds of SR MOSFET
3	Drain	Internal MOSFET drain
4	Source	Internal MOSFET Source
5	Source	Internal MOSFET Source

### ORDERING INFORMATION

Part Number	Package	Part Marking
SP6035T255TGB	TO-252-5L	SP6035


※ SP6035T255TGB : Tube ; Pb – Free ; Halogen - Free



# SP6035

## High Performance Synchronous Rectifier Driver

### BLOCK DIAGRAM

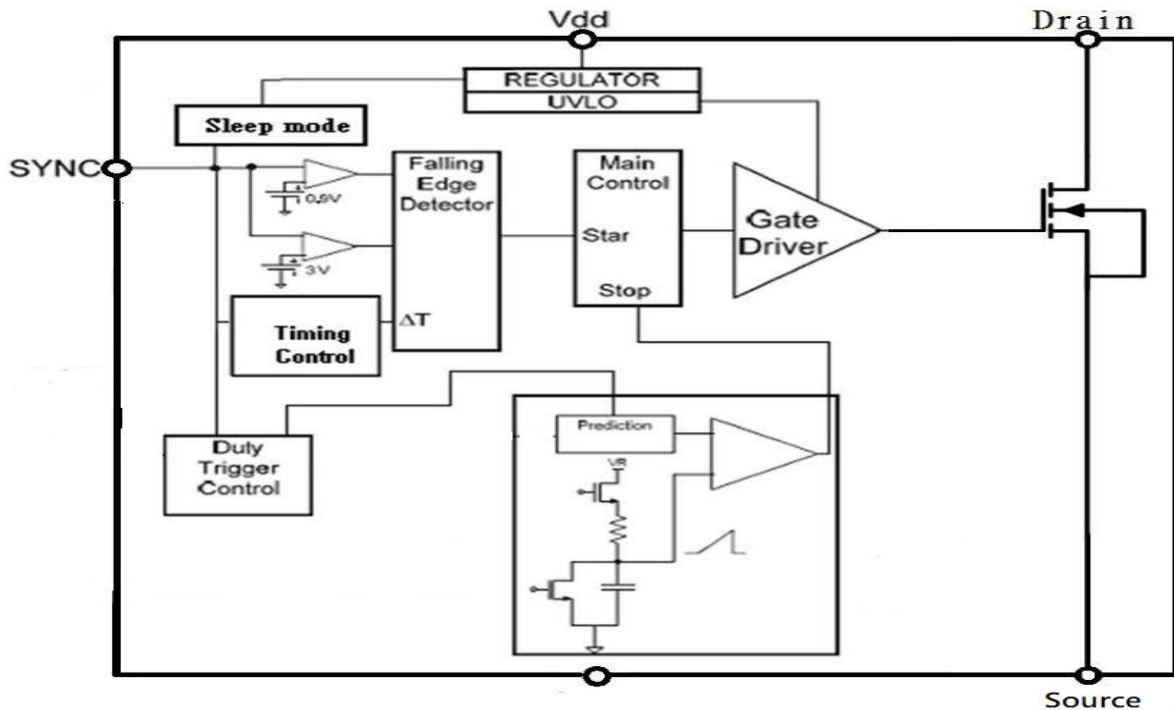

### ABSOLUTE MAXIMUM RATINGS (TA=25°C, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

Symbol	Parameter	Value	Unit
V <sub>dd</sub>	DC Supply Voltage	16	V
I <sub>DRAIN</sub>	Continuous Drain Current (T <sub>c</sub> = 25°C)	4	A
	Continuous Drain Current (T <sub>c</sub> = 100°C)	3.5	A
V <sub>d</sub> to V <sub>s</sub>	Drain to Source	60	V
P <sub>D</sub>	Power Dissipation @ T <sub>c</sub> =25°C (*)	93	W
T <sub>J</sub>	Operating Junction Temperature Range	-40 to 125	°C
T <sub>STG</sub>	Storage Temperature Range	-40 to 150	°C
T <sub>LEAD</sub>	Lead Soldering Temperature for 5 sec.	260	°C

### THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
R <sub>θJC</sub>	Thermal Resistance-Junction to Case (*)	1.1	°C/W

(\*) The power dissipation and thermal resistance are evaluated under copper board mounted with free air conditions.




# SP6035

## High Performance Synchronous Rectifier Driver

### ELECTRICAL CHARACTERISTICS

( $T_A=25^\circ\text{C}$ ,  $V_{dd}=5\text{V}$ , Freq. =50 KHz, Duty Cycle=50%, unless otherwise specified.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
<b>SUPPLY INPUT</b>						
I <sub>dd</sub>	Supply current	No load & Sleep mode	0.05	0.11	0.3	mA
		$V_{\text{SYNC}}=\text{DC } 12\text{V}$	2.3	2.65	2.95	mA
V <sub>dd</sub>	Supply voltage	I <sub>dd peak</sub> < 1A	4.3		16	V
V <sub>dd on</sub>	Enable voltage		3.4	3.5	4.3	V
V <sub>dd hysteresis</sub>	Enable voltage			0.2		V
<b>SYNC REFERENCE (SYNC)</b>						
V <sub>shth</sub>	SYNC high threshold			3.0		V
V <sub>slth</sub>	SYNC low threshold			0.97		V
V <sub>sync</sub>	SYNC clamp voltage	I <sub>sync</sub> =3mA	V <sub>dd</sub> +1.5			V
V <sub>sync WK</sub>	SYNC wake-up voltage		12			V
I <sub>sync</sub>	SYNC input current				3	mA
<b>PREDICTION SECTION</b>						
T <sub>d</sub>	Propagation delay			150		nS
T <sub>pred</sub>	Dead time			1		uS
<b>SR MOSFET SECTION</b>						
BV <sub>dss</sub>	MOSFET Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	60			V
R <sub>ds(on)</sub>	On Resistance	V <sub>GS</sub> =10V, I <sub>D</sub> =20A		3.6	4.3	mΩ
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> =30V, V <sub>GS</sub> =0V f=1MHz		3800		
C <sub>oss</sub>	Output Capacitance			520		
C <sub>rss</sub>	Reverse Transfer Capacitance			50		
T <sub>d(on)</sub>	Turn On Time			16		
T <sub>d(off)</sub>	Turn Off Time	V <sub>DD</sub> =30V, I <sub>D</sub> =20A		55		
T <sub>f</sub>	Fall time	V <sub>GEN</sub> =10V, R <sub>G</sub> =10Ω		35		nS

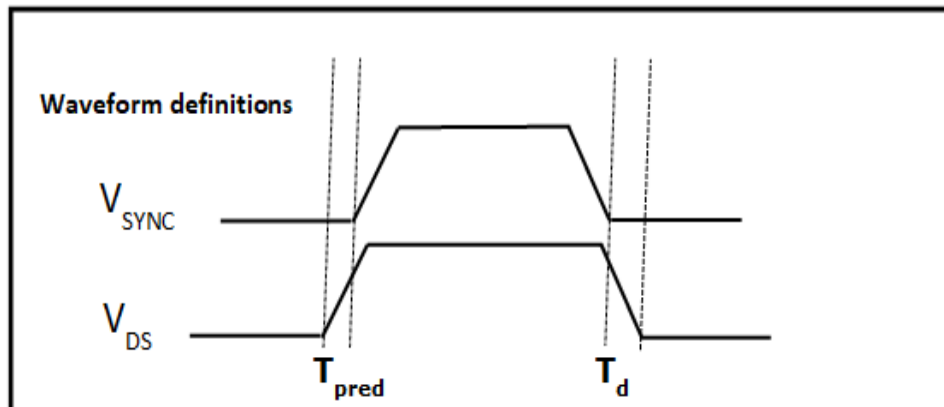




# SP6035

## High Performance Synchronous Rectifier Driver

### TO-252-5L PACKAGE OUTLINE

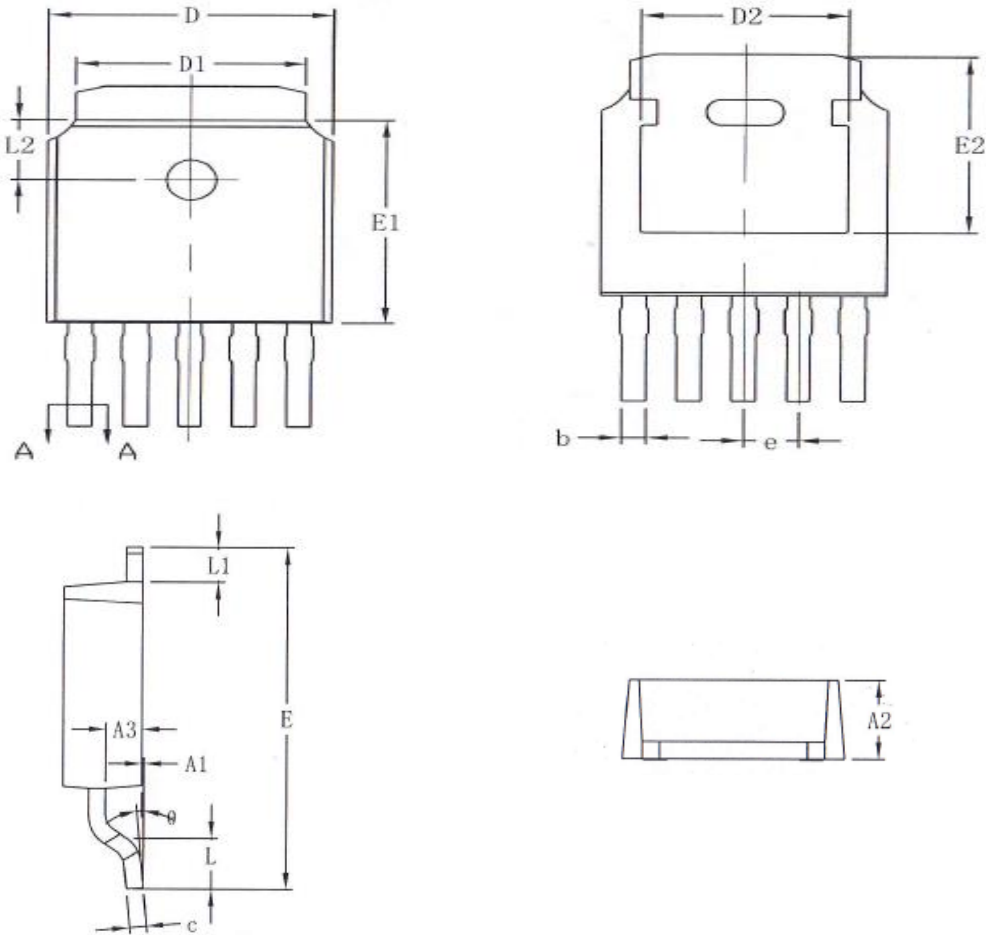

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A1	0.00	—	0.10
A2	2.20	2.30	2.40
A3	1.02	1.07	1.12
b	0.54	—	0.62
b1	0.53	0.56	0.59
c	0.51	—	0.55
c1	0.50	0.51	0.52
D	6.50	6.60	6.70
D1	5.33 REF.		
D2	4.83 REF.		
E	9.90	10.10	10.30
E1	6.00	6.10	6.20
E2	5.30REF		
e	1.27BSC		
L	1.40	1.50	1.60
L1	1.02REF.		
L2	1.70	1.80	1.90
θ	0	—	8°



# SP6035

## High Performance Synchronous Rectifier Driver

---

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties, which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2018 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

<http://www.syncpower.com>