



SPP7407

P-Channel Enhancement Mode MOSFET

DESCRIPTION

The SPP7407 is the P-Channel logic enhancement mode power field effect transistors are produced using high cell density , DMOS trench technology.

This high density process is especially tailored to minimize on-state resistance.

These devices are particularly suited for low voltage application such as cellular phone and notebook computer power management and other battery powered circuits where high-side switching , and low in-line power loss are needed in a very small outline surface mount package.



APPLICATIONS

- Power Management in Note book
- Portable Equipment
- Battery Powered System
- DC/DC Converter
- Load Switch
- DSC
- LCD Display inverter


FEATURES

- ◆ -20V/-3.4A,R_{DS(ON)}= 100mΩ@V_{GS}=-4.5V
- ◆ -20V/-2.4A,R_{DS(ON)}= 125mΩ@V_{GS}=-2.5V
- ◆ -20V/-1.7A,R_{DS(ON)}= 180mΩ@V_{GS}=-1.8V
- ◆ Super high density cell design for extremely low RDS (ON)
- ◆ Exceptional on-resistance and maximum DC current capability
- ◆ SOT-323 (SC-70) package design

PIN CONFIGURATION (SOT-323 ; SC-70)



PART MARKING





SPP7407

P-Channel Enhancement Mode MOSFET

PIN DESCRIPTION

Pin	Symbol	Description
1	G	Gate
2	S	Source
3	D	Drain

ORDERING INFORMATION

Part Number	Package	Part Marking
SPP7407S32RG	SOT-323	07YW
SPP7407S32RGB	SOT-323	07YW

- ※ Week Code : A ~ Z(1 ~ 26) ; a ~ z(27 ~ 52)
- ※ SPP7407S32RG : Tape Reel ; Pb – Free
- ※ SPP7407S32RGB : Tape Reel ; Pb – Free ; Halogen -Free

ABSOULTE MAXIMUM RATINGS

(TA=25°C Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V _{DSS}	-20	V
Gate –Source Voltage	V _{GSS}	±12	V
Continuous Drain Current(T _J =150°C)	T _A =25°C	-2.3	A
	T _A =70°C	-1.7	
Pulsed Drain Current	I _{DM}	-6	A
Continuous Source Current(Diode Conduction)	I _S	-1.4	A
Power Dissipation	T _A =25°C	0.33	W
	T _A =70°C	0.21	
Operating Junction Temperature	T _J	-55/150	°C
Storage Temperature Range	T _{STG}	-55/150	°C
Thermal Resistance-Junction to Ambient	R _{θJA}	105	°C/W



SPP7407

P-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS

(TA=25°C Unless otherwise noted)





Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, ID=-250uA	-20			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , ID=-250uA	-0.35		-0.8	
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V			-1	
		V _{DS} =-20V, V _{GS} =0V T _J =55°C			-5	uA
On-State Drain Current	I _{D(on)}	V _{DS} ≤-5V, V _{GS} =-4.5V	-6			A
Drain-Source On-Resistance	R _{DSS(on)}	V _{GS} =-4.5V, ID=-3.4A		0.080	0.100	
		V _{GS} =-2.5V, ID=-2.4A		0.105	0.125	
		V _{GS} =-1.8V, ID=-1.7A		0.130	0.180	
Forward Transconductance	g _{fs}	V _{DS} =-5V, ID=-2.8A		6		S
Diode Forward Voltage	V _{SD}	I _S =-1.5A, V _{GS} =0V		-0.8	-1.2	V
Dynamic						
Total Gate Charge	Q _g	V _{DS} =-6V, V _{GS} =-4.5V ID=-2.8A		4.8	8	
Gate-Source Charge	Q _{gs}			1.0		nC
Gate-Drain Charge	Q _{gd}			1.0		
Input Capacitance	C _{iss}	V _{DS} =-6V, V _{GS} =0V f=1MHz		485		
Output Capacitance	C _{oss}			85		pF
Reverse Transfer Capacitance	C _{rss}			40		
Turn-On Time	t _{d(on)}	V _{DD} =-6V, R _L =6Ω ID=-1.0A, V _{GEN} =-4.5V R _G =6Ω		10	16	
	t _r			13	23	
Turn-Off Time	t _{d(off)}			18	25	
	t _f			15	20	ns



SPP7407

P-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

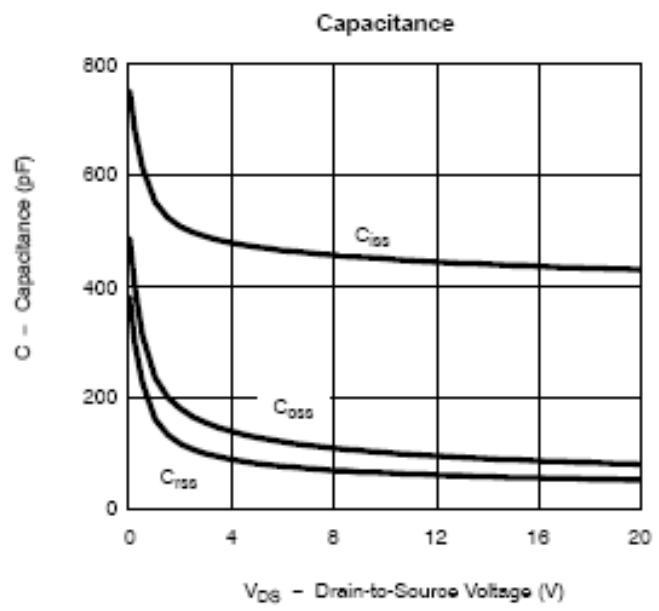
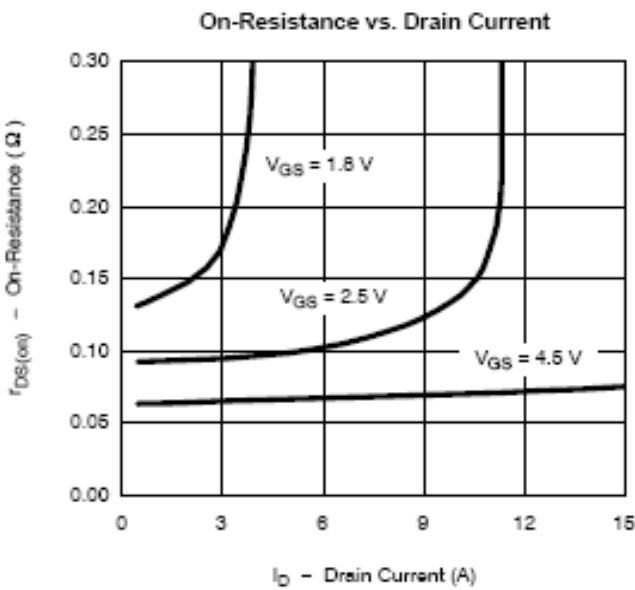
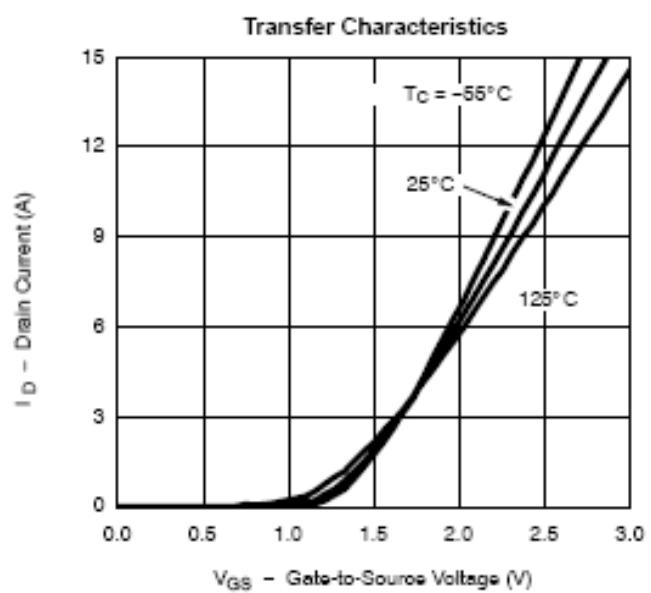
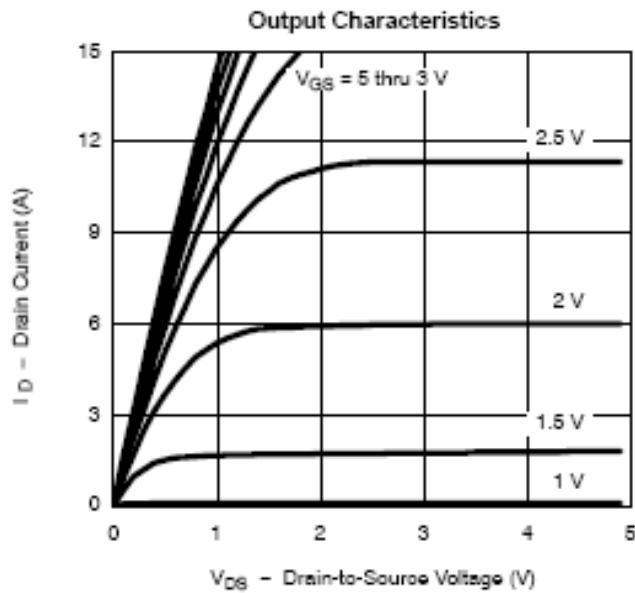




SPP7407

P-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

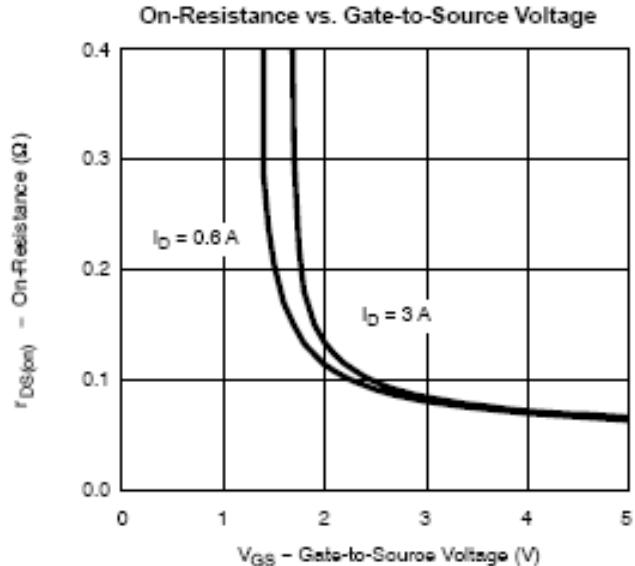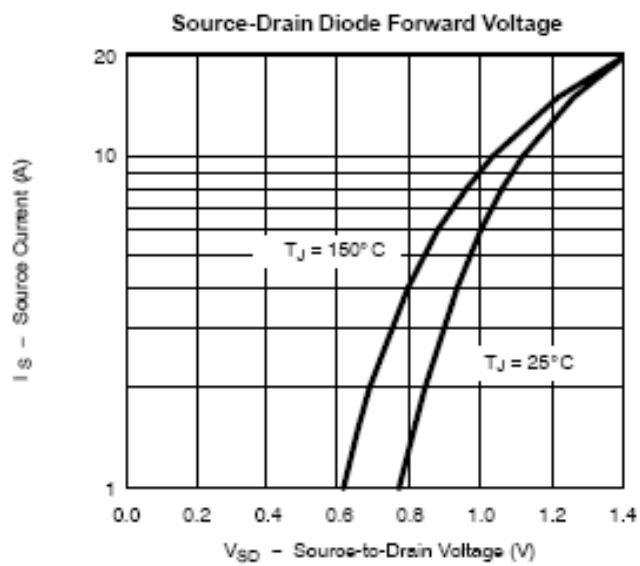
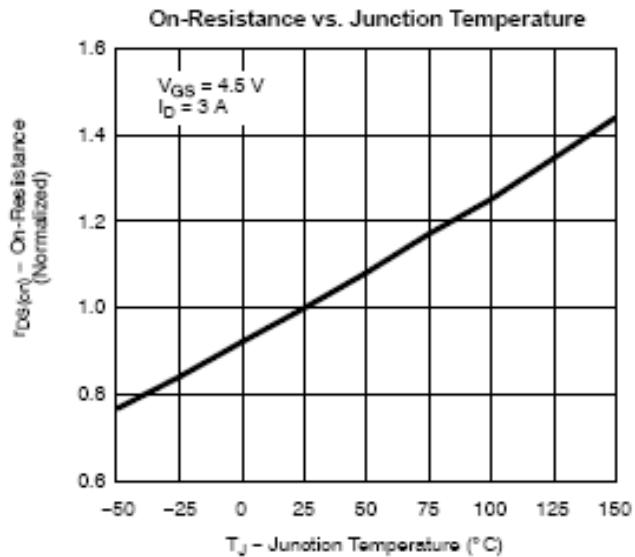
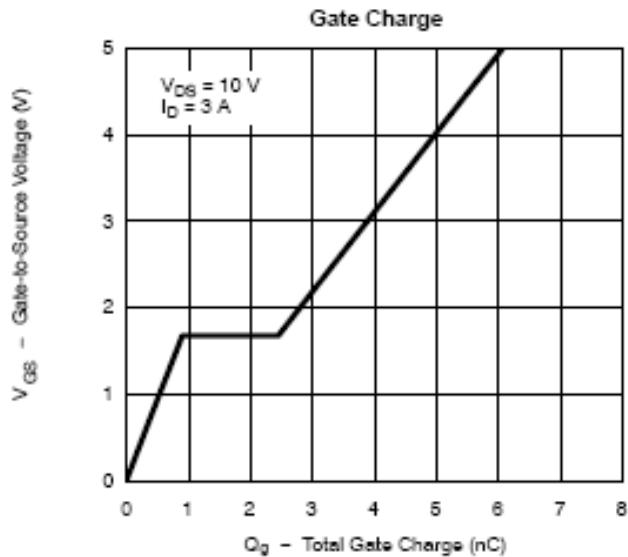




SPP7407

P-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

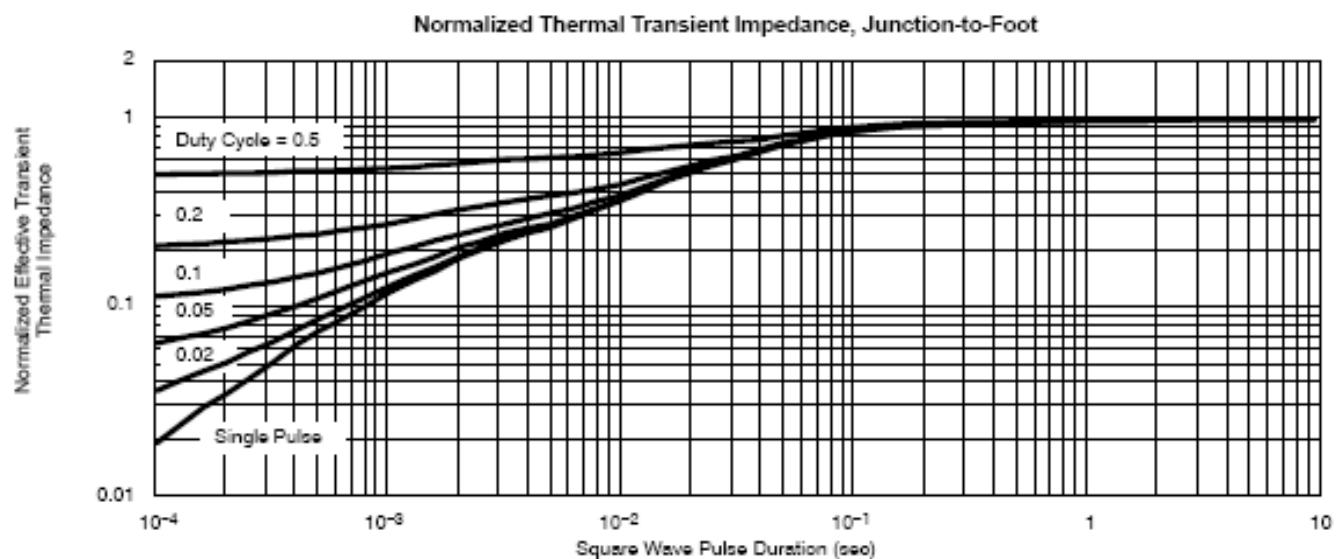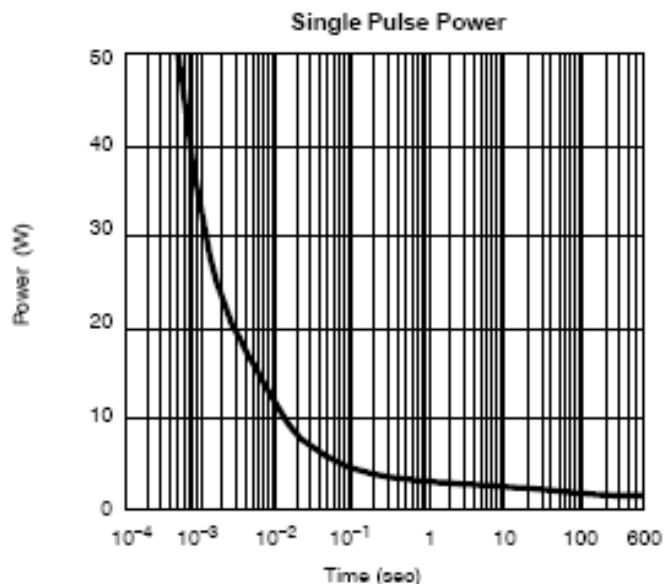
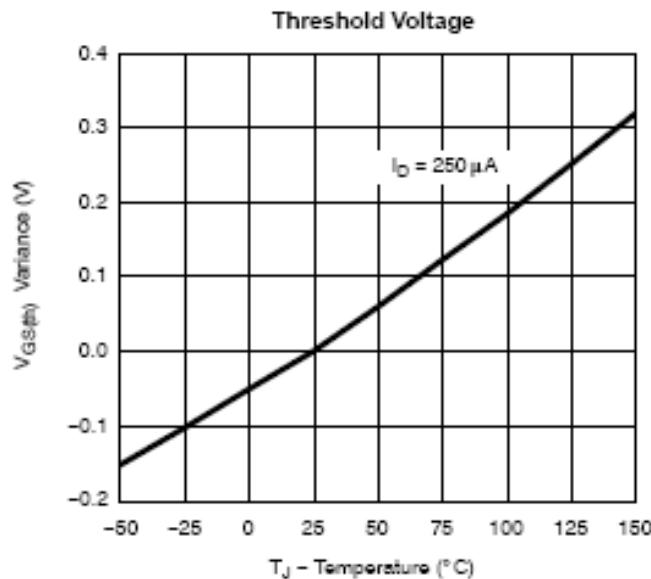




SPP7407

P-Channel Enhancement Mode MOSFET

SOT-323 PACKAGE OUTLINE

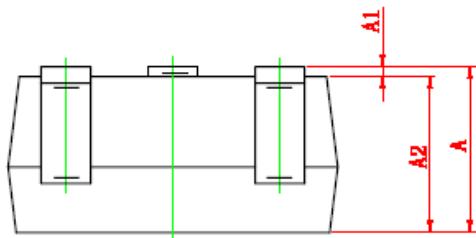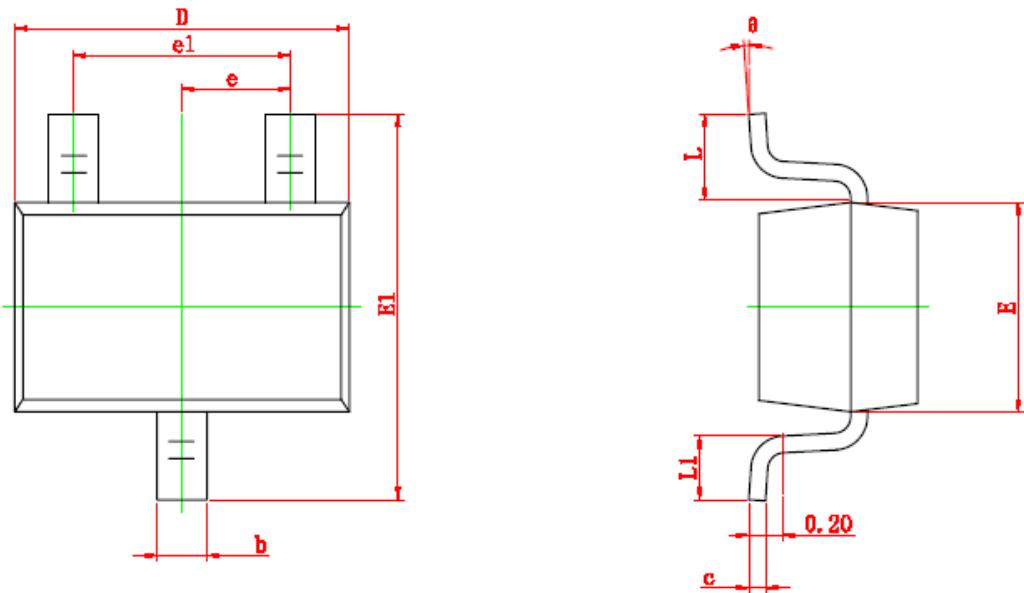

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°



SPP7407

P-Channel Enhancement Mode MOSFET

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2017 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

9F-5, No.3-2, Park Street

NanKang District (NKSP), Taipei, Taiwan 115

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

© <http://www.syncpower.com>